


avenlur

Sweetgum LG by Avenlur

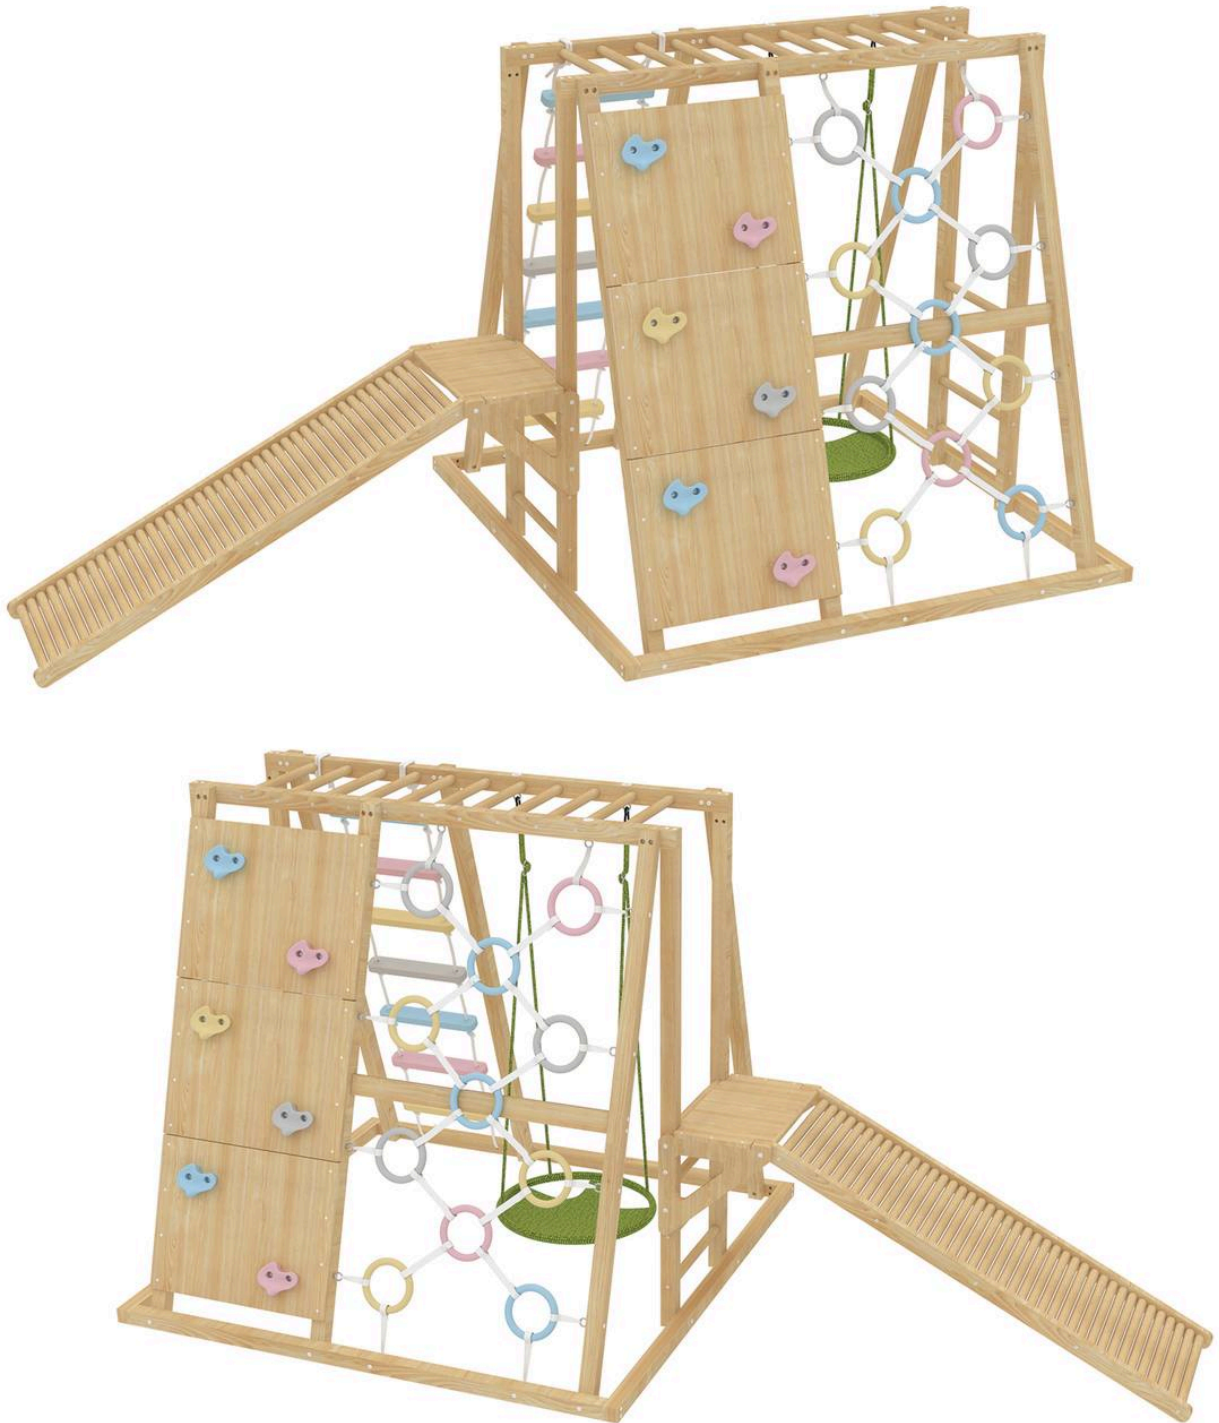

Need Help?

CALL US AT 888.697.3931 / M-F 9AM - 5PM PT (12PM - -8PM ET)
OR EMAIL US AT INFO@AVENLUR.COM

WARNING

Adult assembly required.

WARNING

Maximum user weight: 110 lbs (50kg) per child.

WARNING

CHOKING HAZARD:

Adult assembly required. Keep small assembly parts out of reach of children.

 Use under adult supervision.

OBSERVE ALL STATEMENTS AND WARNINGS TO REDUCE THE LIKELIHOOD OF SERIOUS OR FATAL INJURY. SAVE THIS SHEET FOR FUTURE REFERENCE.

OPERATION INSTRUCTIONS

1. An adult should always supervise use of this product by children of all ages.
2. Instruct children not to attach items to the playground equipment that are not specifically designed for use with the equipment (examples: ropes, clothesline, pet leashes, cables and chain, etc) as they may cause a strangulation hazard or any other hazard.
3. Never allow children to use the equipment in a manner other than intended.

MAINTENANCE INSTRUCTIONS

1. Inspect the product periodically for loose or damaged components. **Tighten bolts if need.**
2. Check all connections and bolts for tightness at least twice monthly during the usage.
3. Check all coverings and bolts for sharp edges.

INSTALLATION INSTRUCTIONS

Please have an electrical drill available for assembly if possible.

If you have difficulty in installation, please contact us for help and get installation video for reference.

Please Ensure:

1. You are assembling with at least two people to ensure that all sides and parts are leveled.
2. You don't screw the parts in too hard or it will splinter the wood.
3. You follow the directions carefully.

CONTACT US BEFORE ASSEMBLY IF:

- You need assistance with assembly
- You need a replacement part due to a missing part or defective part

Call us at 888-697-3931 M-F 9AM-5PM PT


or email us at info@avenlur.com



① x1 59.5in



② x1 59.5in



③ x1 59.5in




④ x1 59.5in




⑤ x1 57.1in




⑥ x1 57.1in




⑦ x3 62.4in



⑧ x1 62.4in



⑨ x1 62.4in



⑩ x1 62.4in




11 x2 61.9in



12 x1 31.2in




13 x19 15.7in

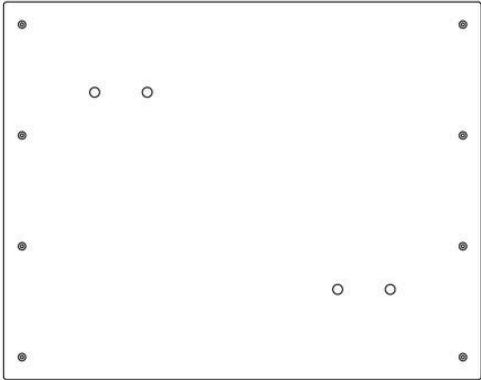


14 x3 22.9in



15 x1 19.5in

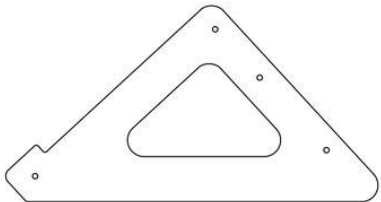

16 x2 17.9in

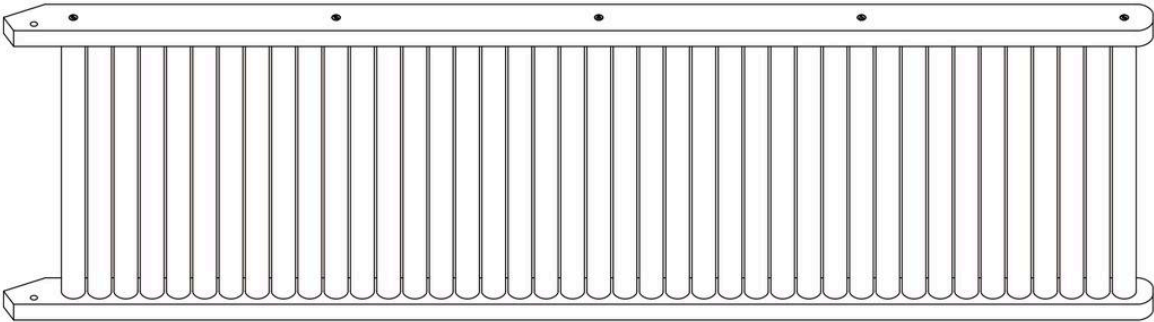


17 x1 55.2in



18 x1 57.1in




19 x1 57.1in

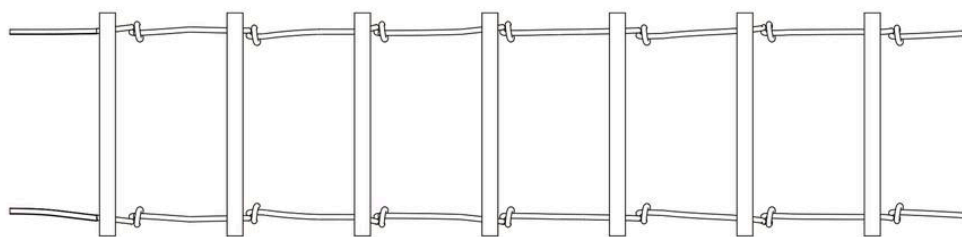


20 x1



21 x6

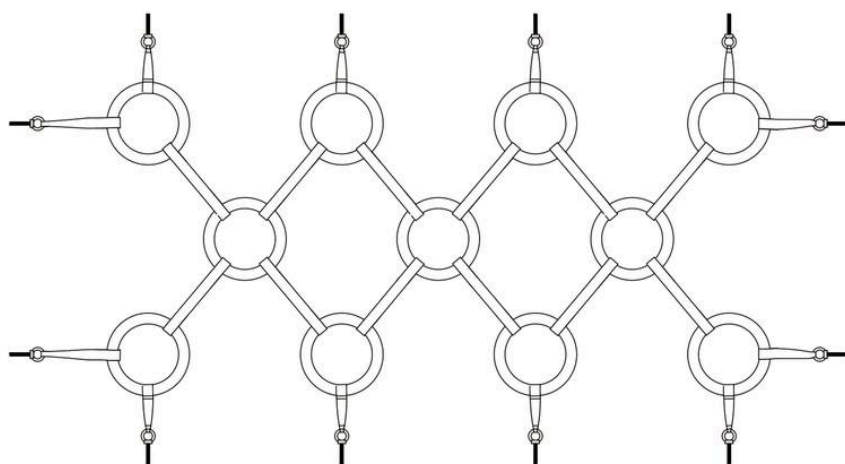

22 x1

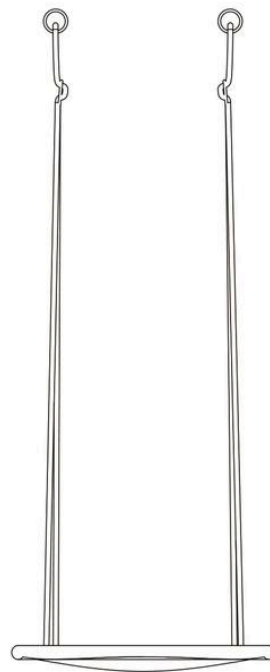

23 x1



M4x45

A x30




M7x60

B x38



M6x80 M6x13

C x12




M6x90 M6x13

D x8



M6x25 M6x30

E x2



M6x25 M6x50

F x6




M6x25 M6x60

G x18




M6x20 M6x80

H x4



M6x30 M6x35

I x2



M6x30

J x2




M6x25

K x10



M10x35

L x12



M x2



4mm

N x2



8mm


O x1



17mm


P x1

Note: Pay attention to all the black bubbled section markers. The manual may refer back to those later.

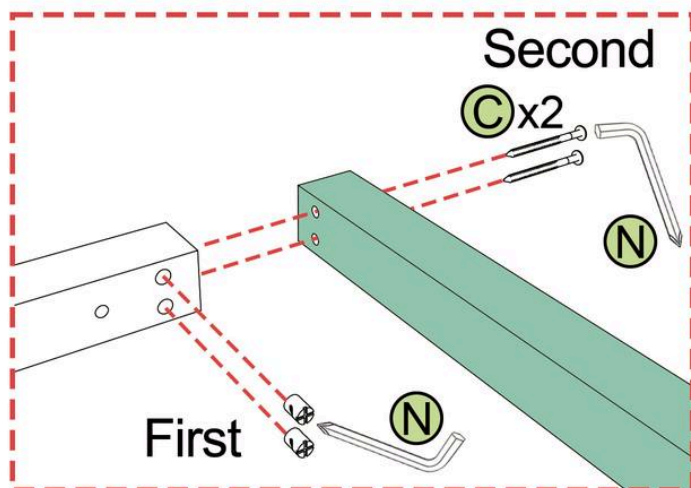



First: Put the connector in the hole with the crosshairs facing out. Use the Philips screwdriver side of tool part (N) to hold the connector stationary for the threading of the screw to go in.

Second: Use the hex side of the other tool part (N) to thread the screw into the hole of the connector.

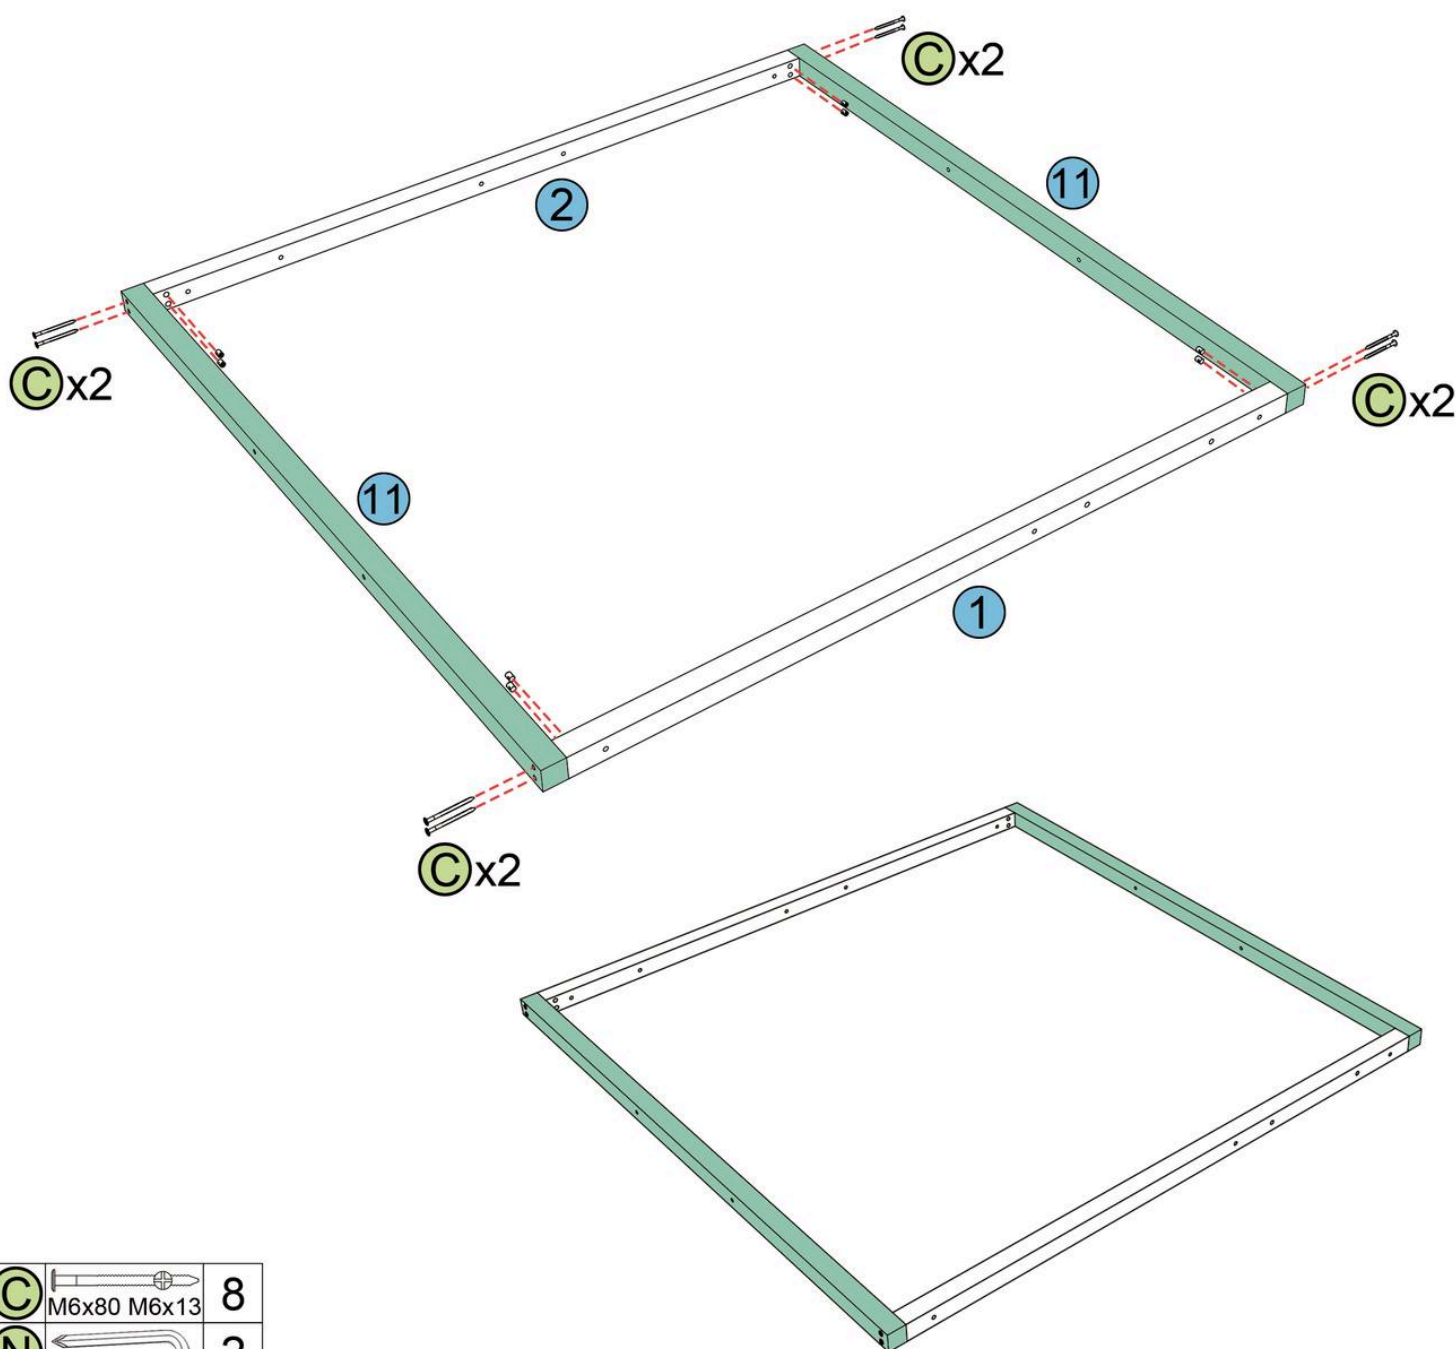


(C)	M6x80 M6x13	8
(N)	4mm	2



02-1

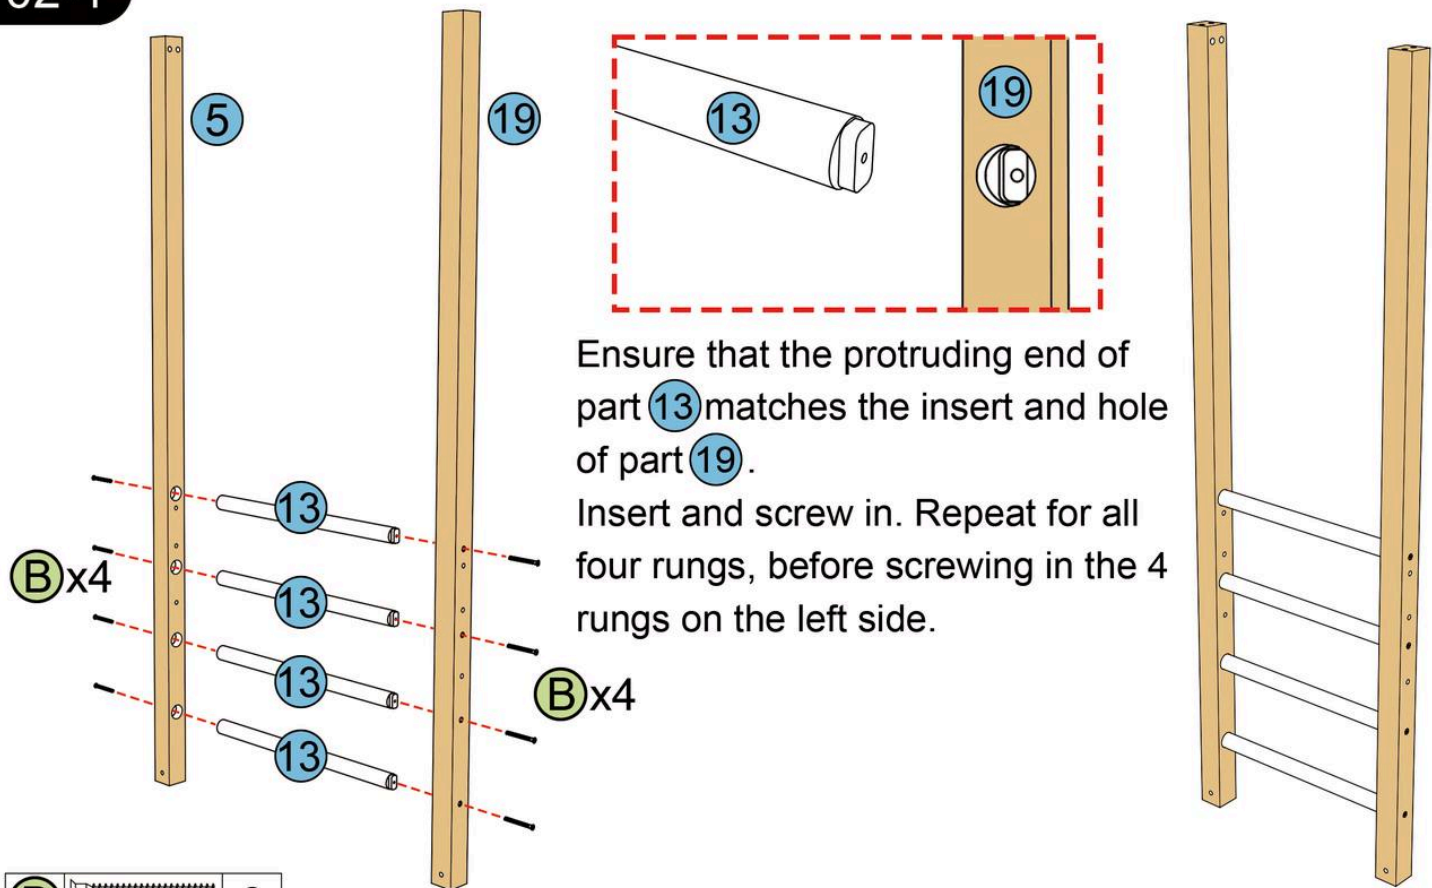



03-1

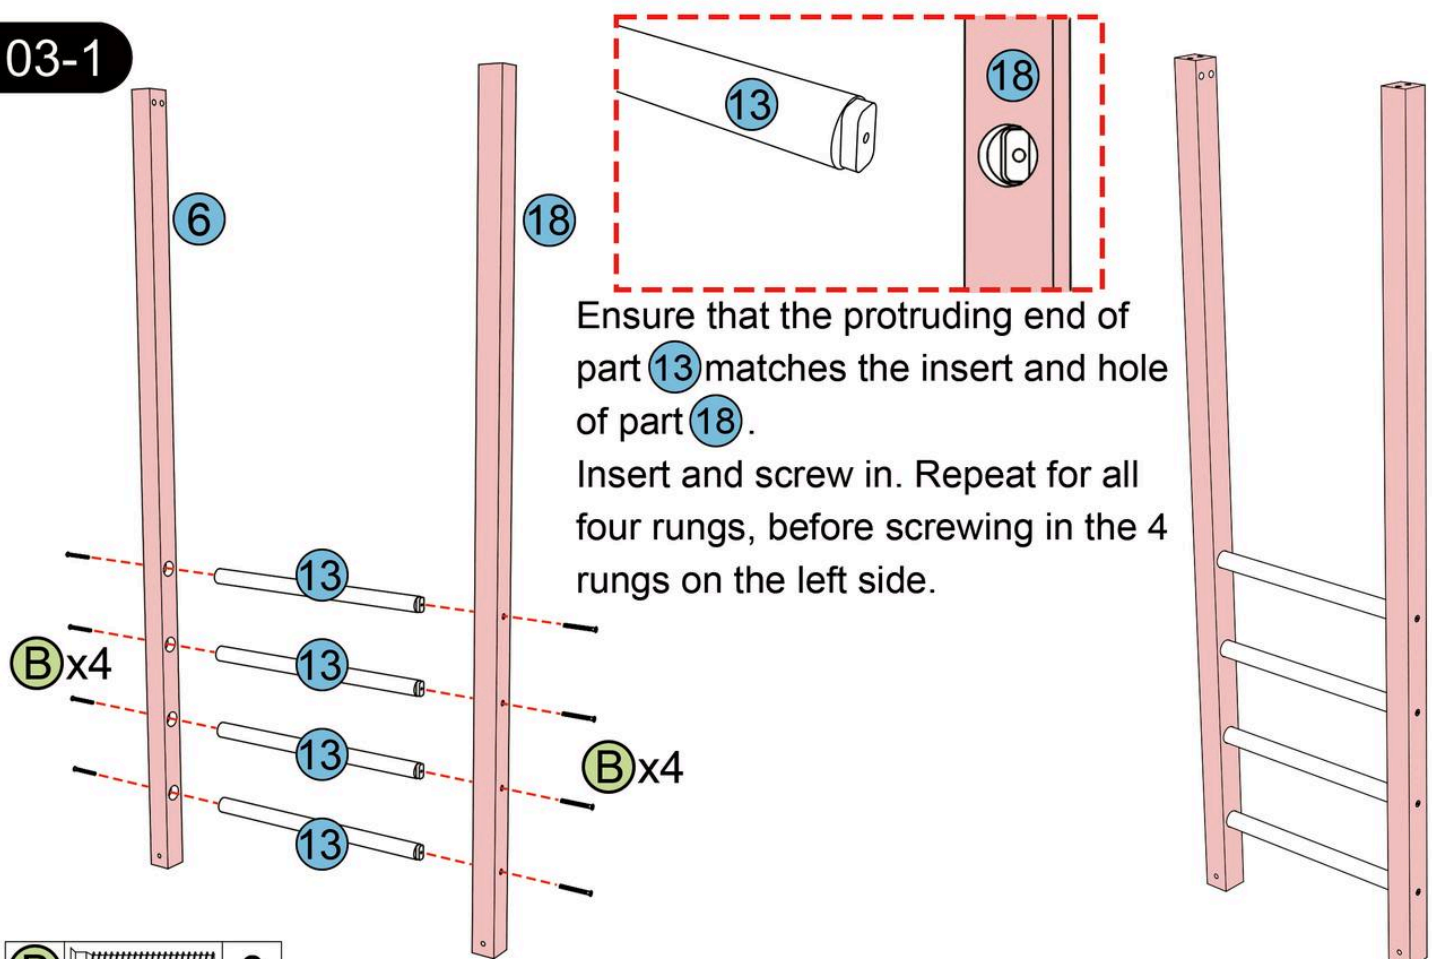



04-1

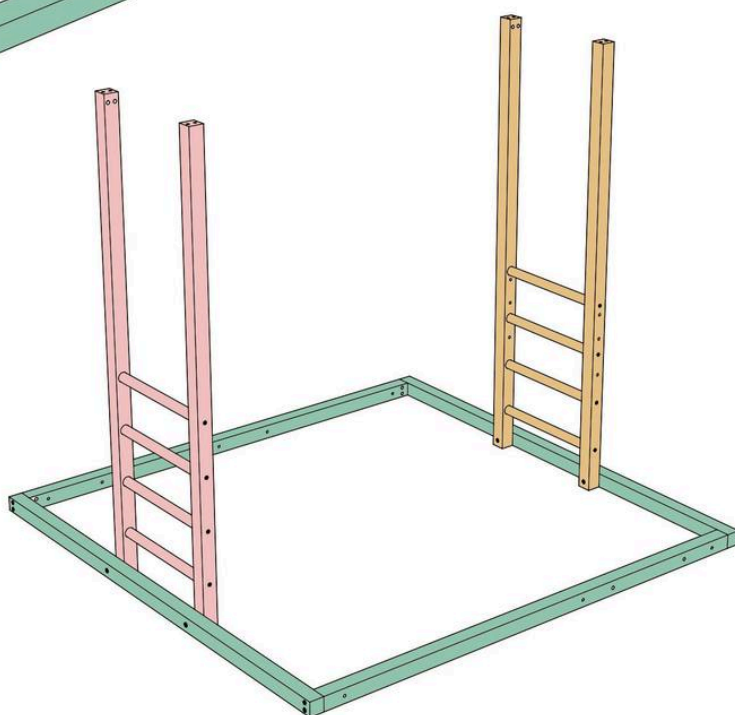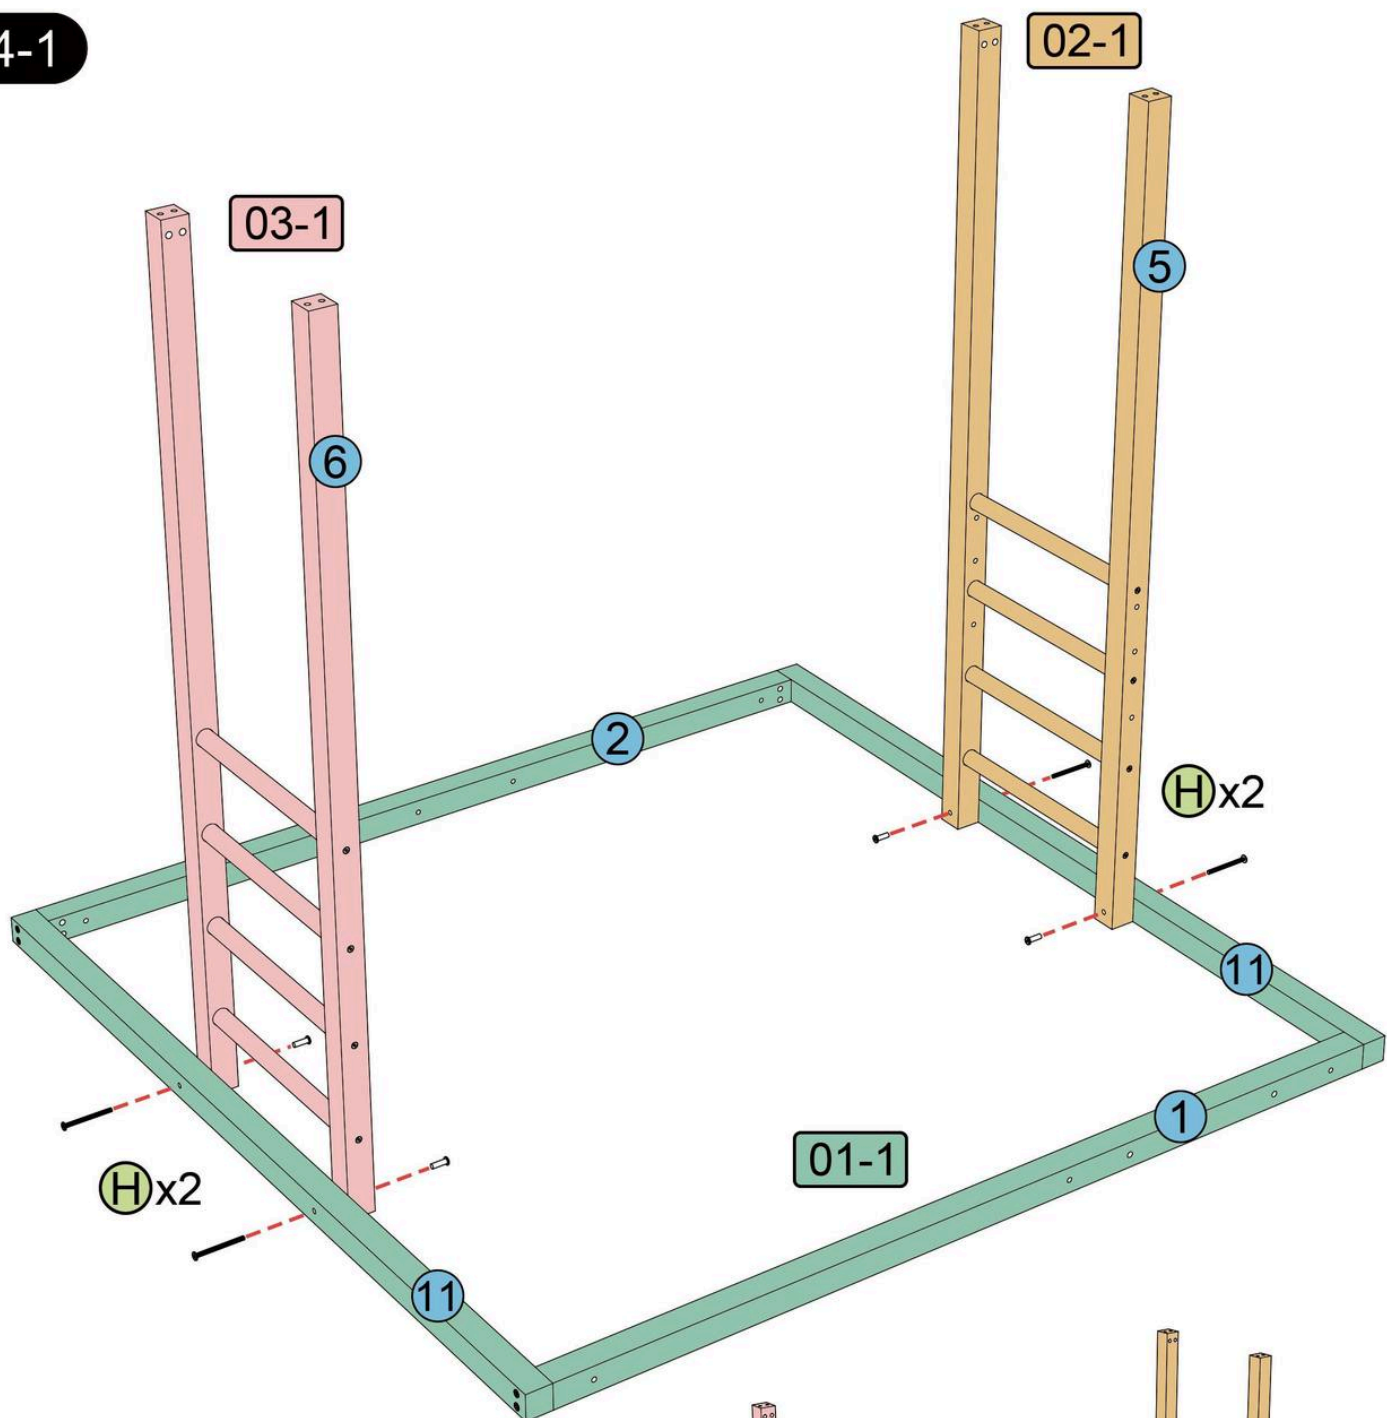


(H)		4
	M6x20 M6x80	
(N)		2
	4mm	

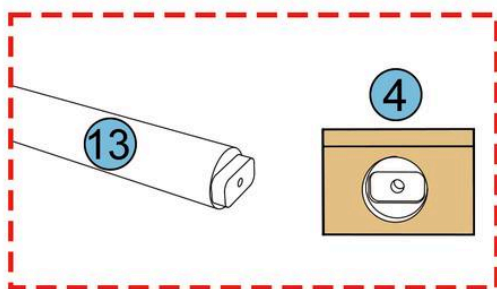



Ensure that the protruding end of part 13 matches the insert and hole of part 4. Insert and screw in. Repeat for all eleven rungs, before screwing in the eleven rungs on the other side .

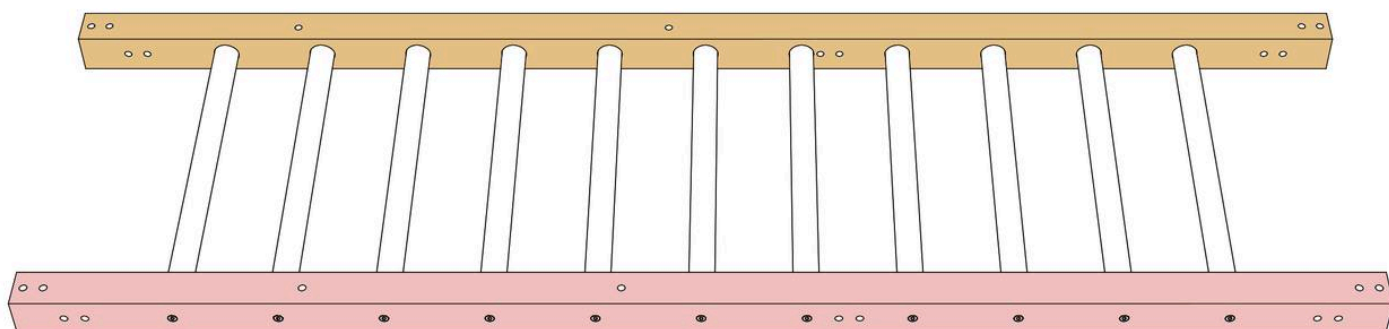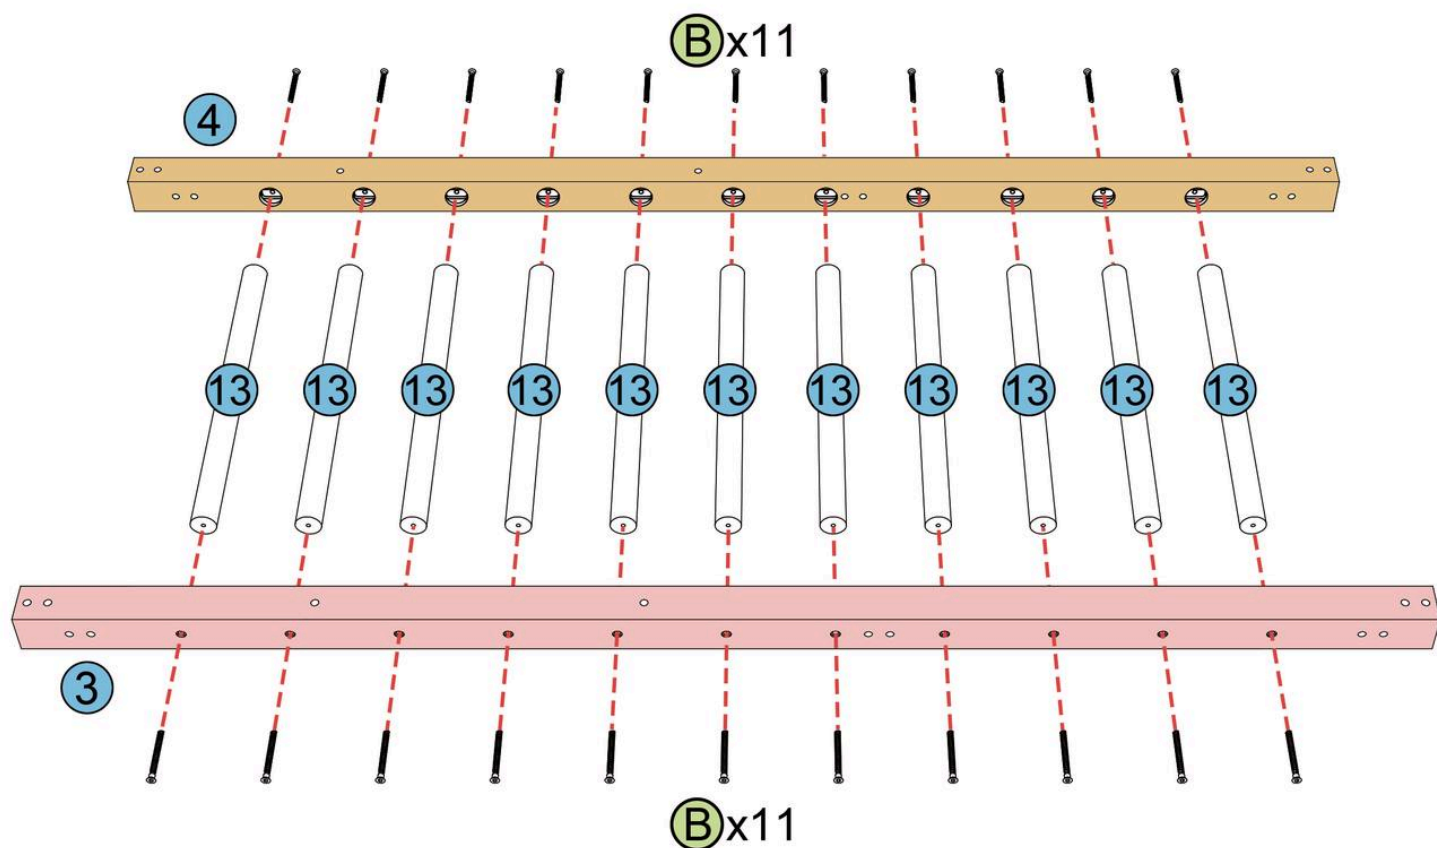

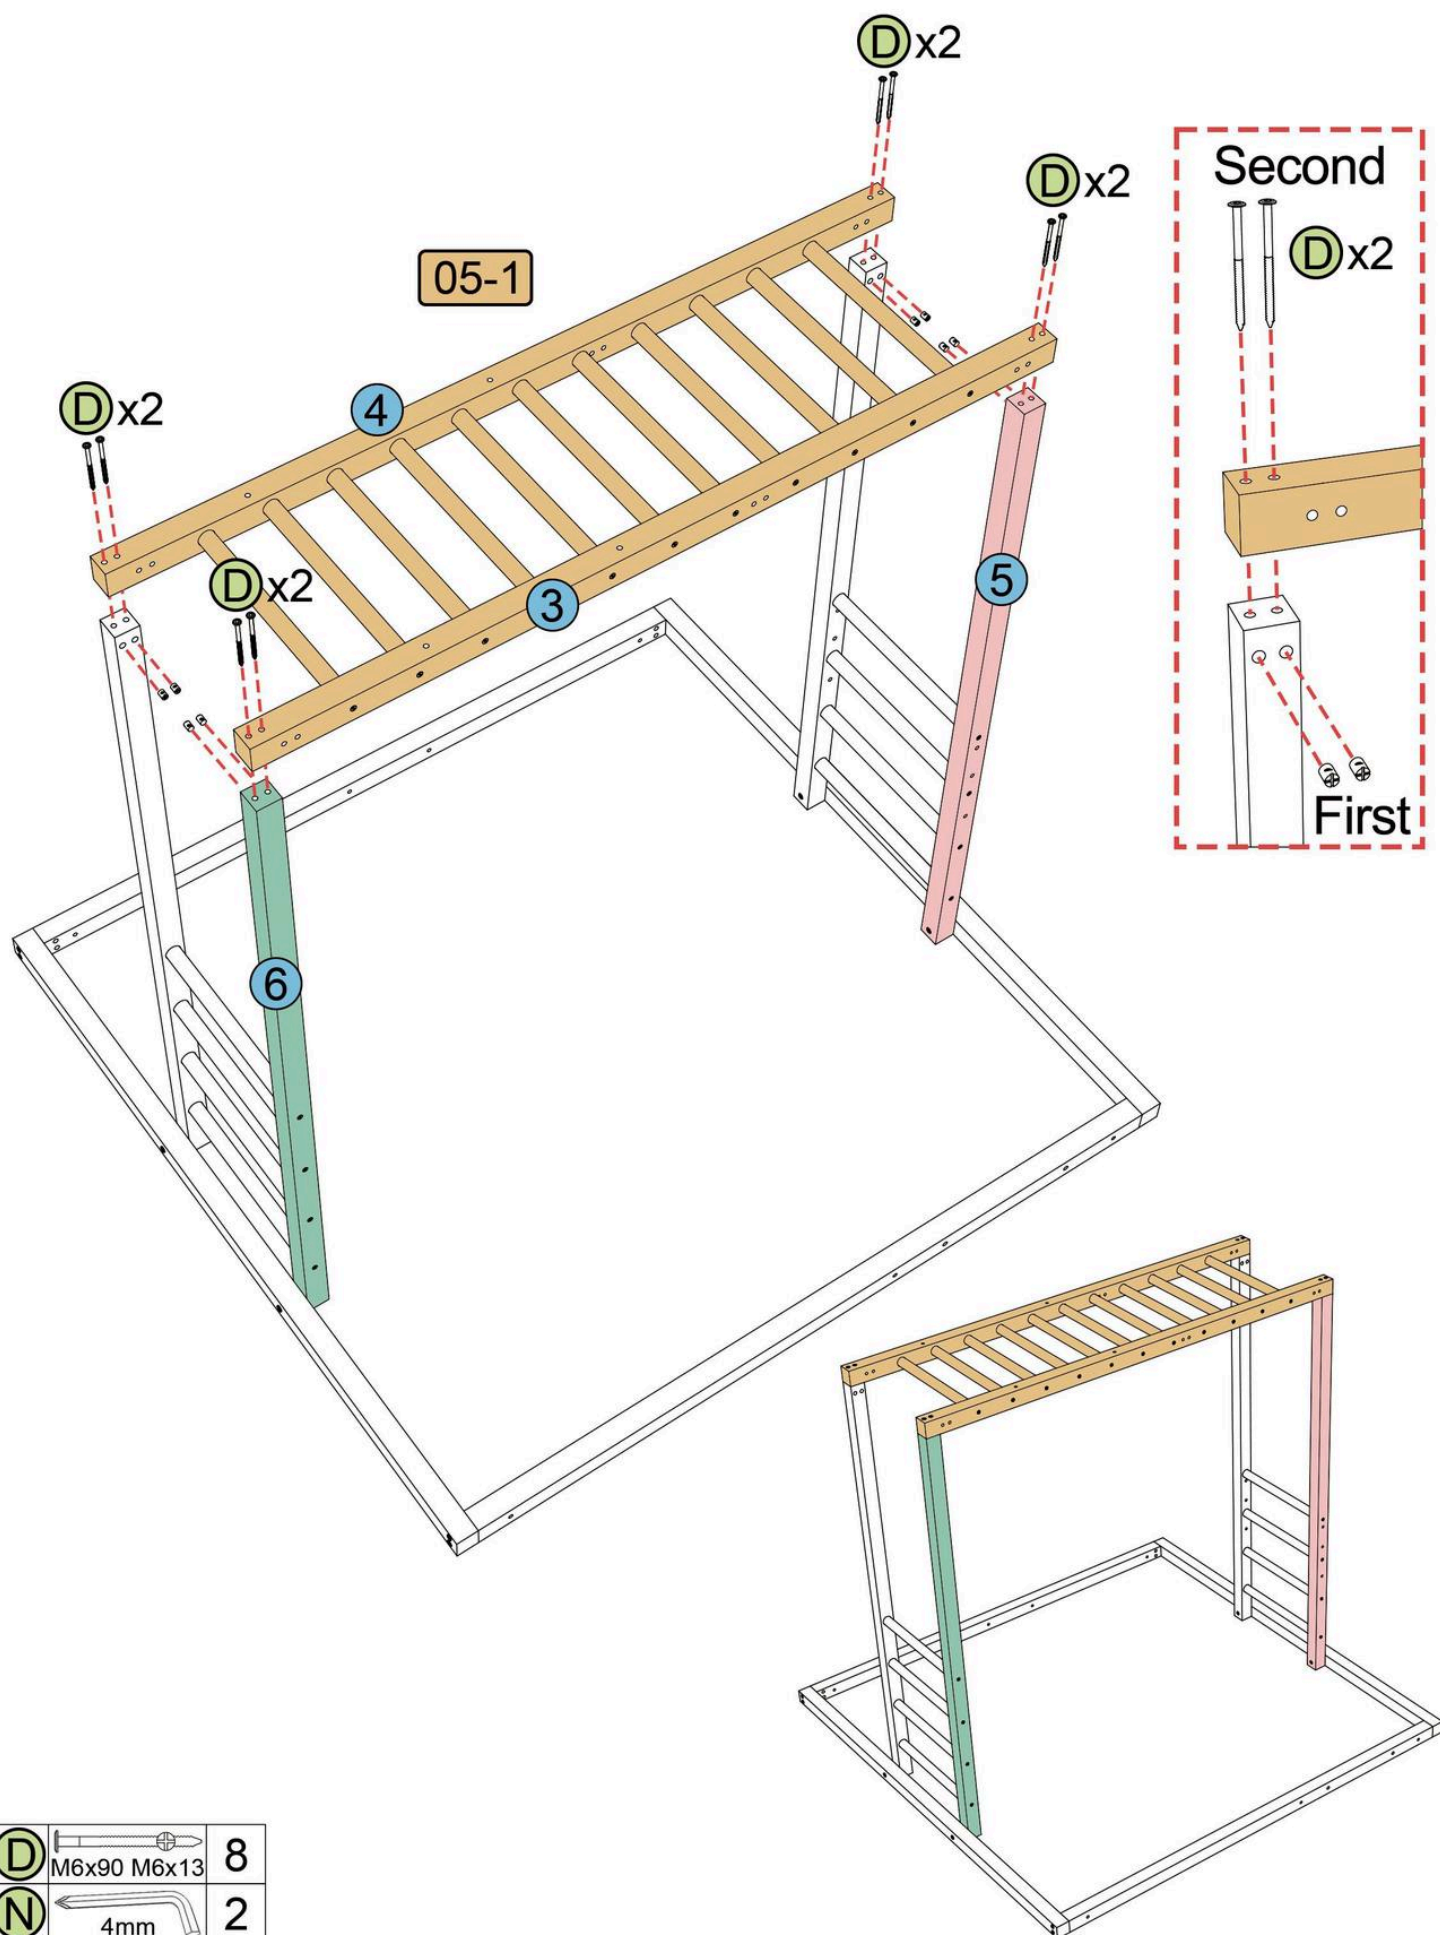



07-1


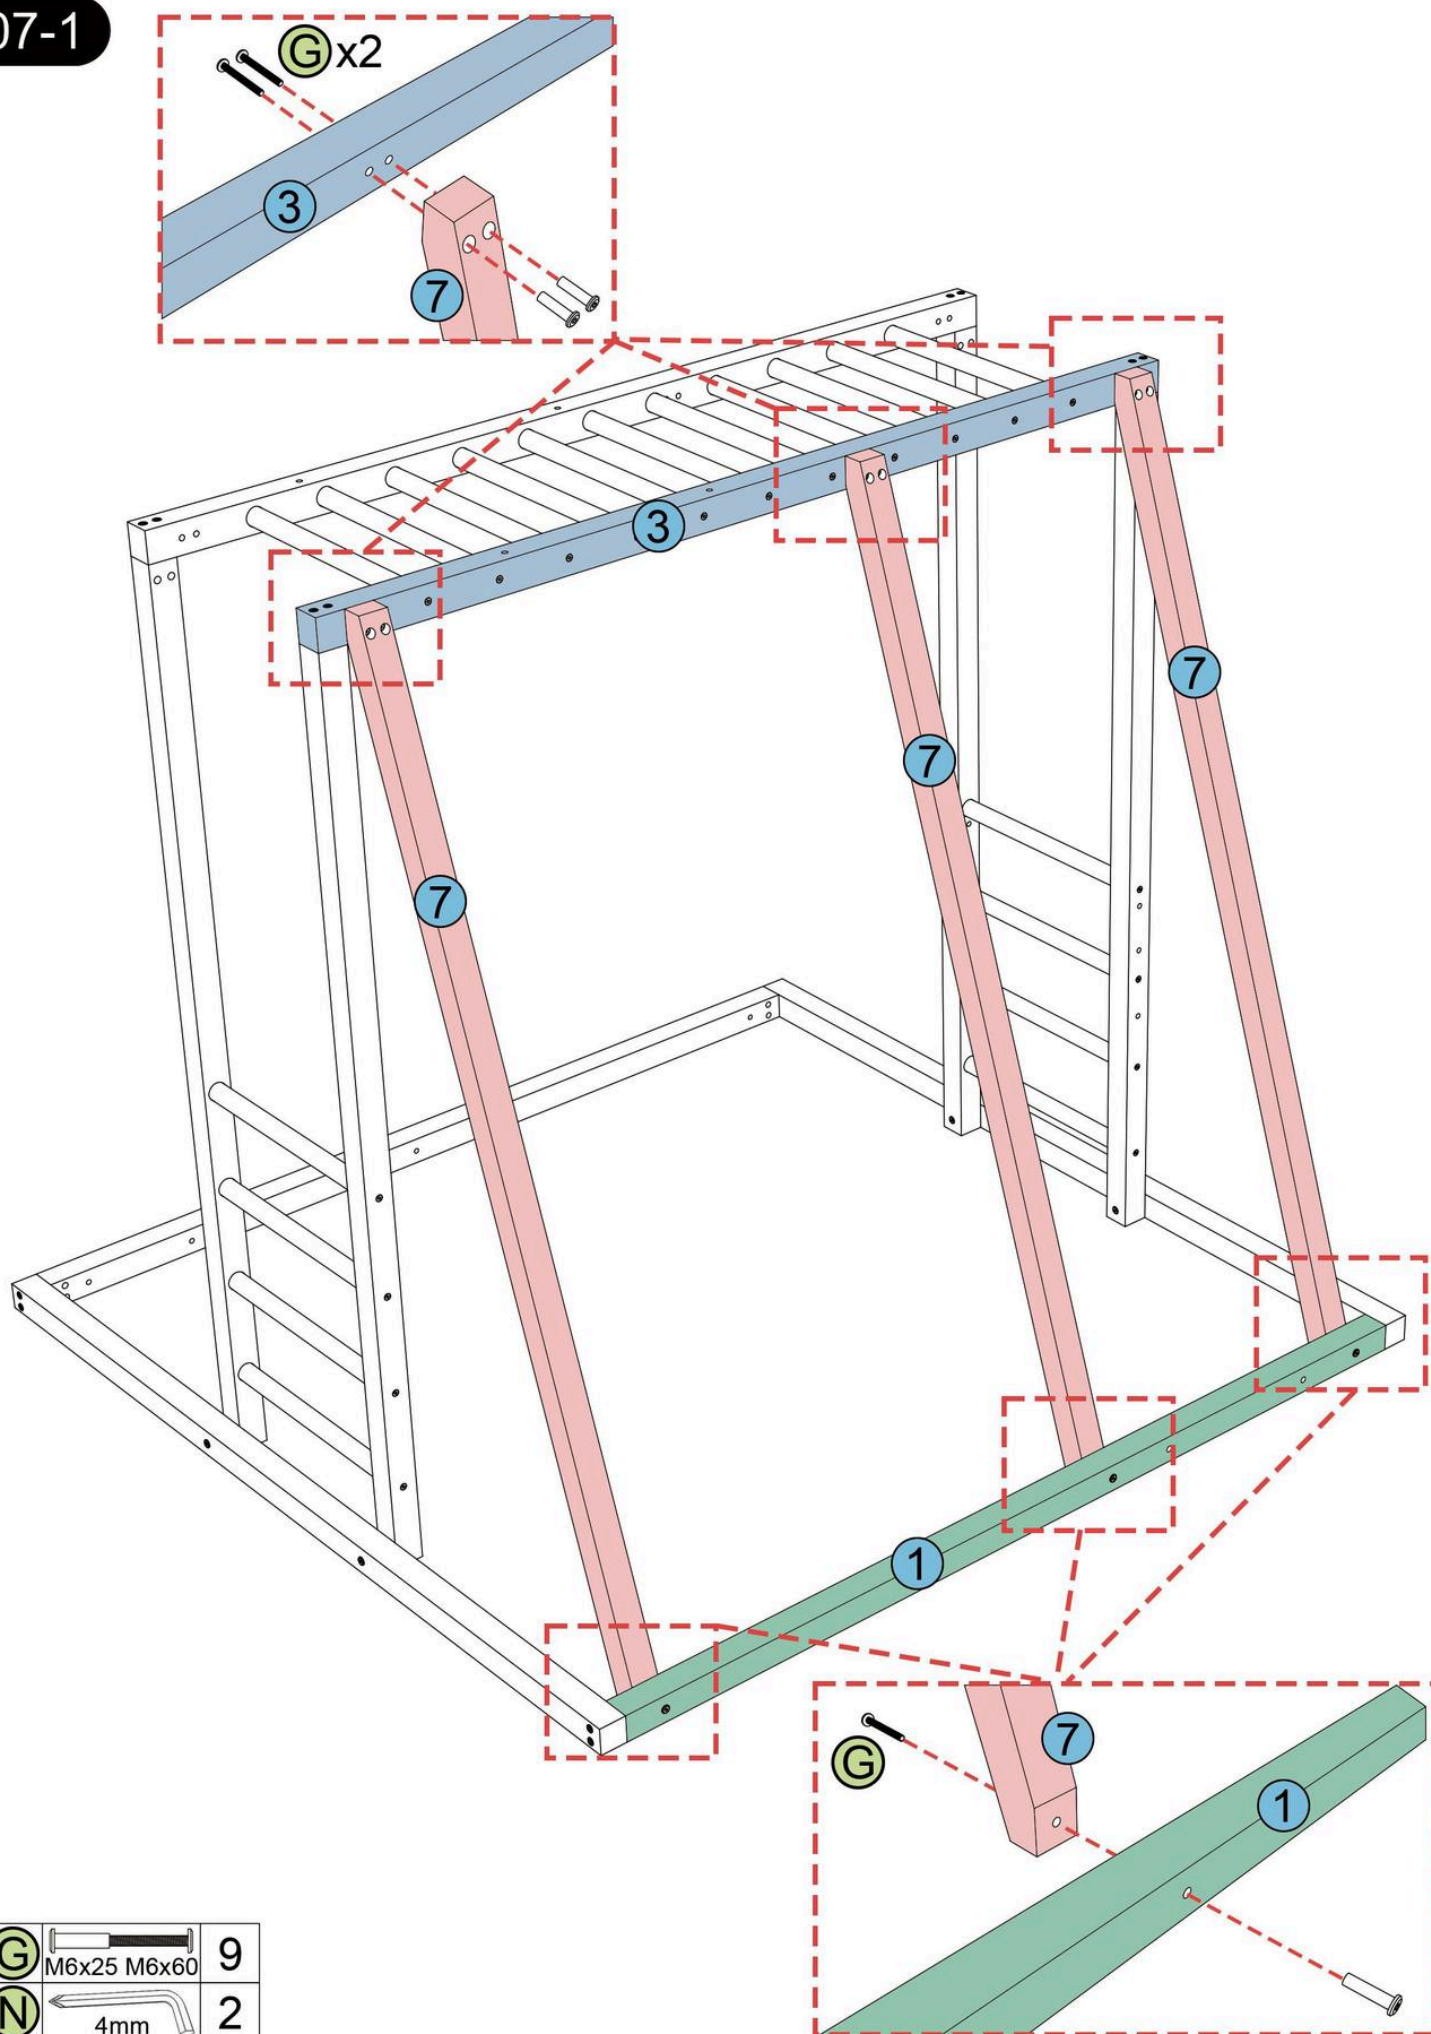


G		9
	M6x25 M6x60	
N		2
	4mm	

08-1

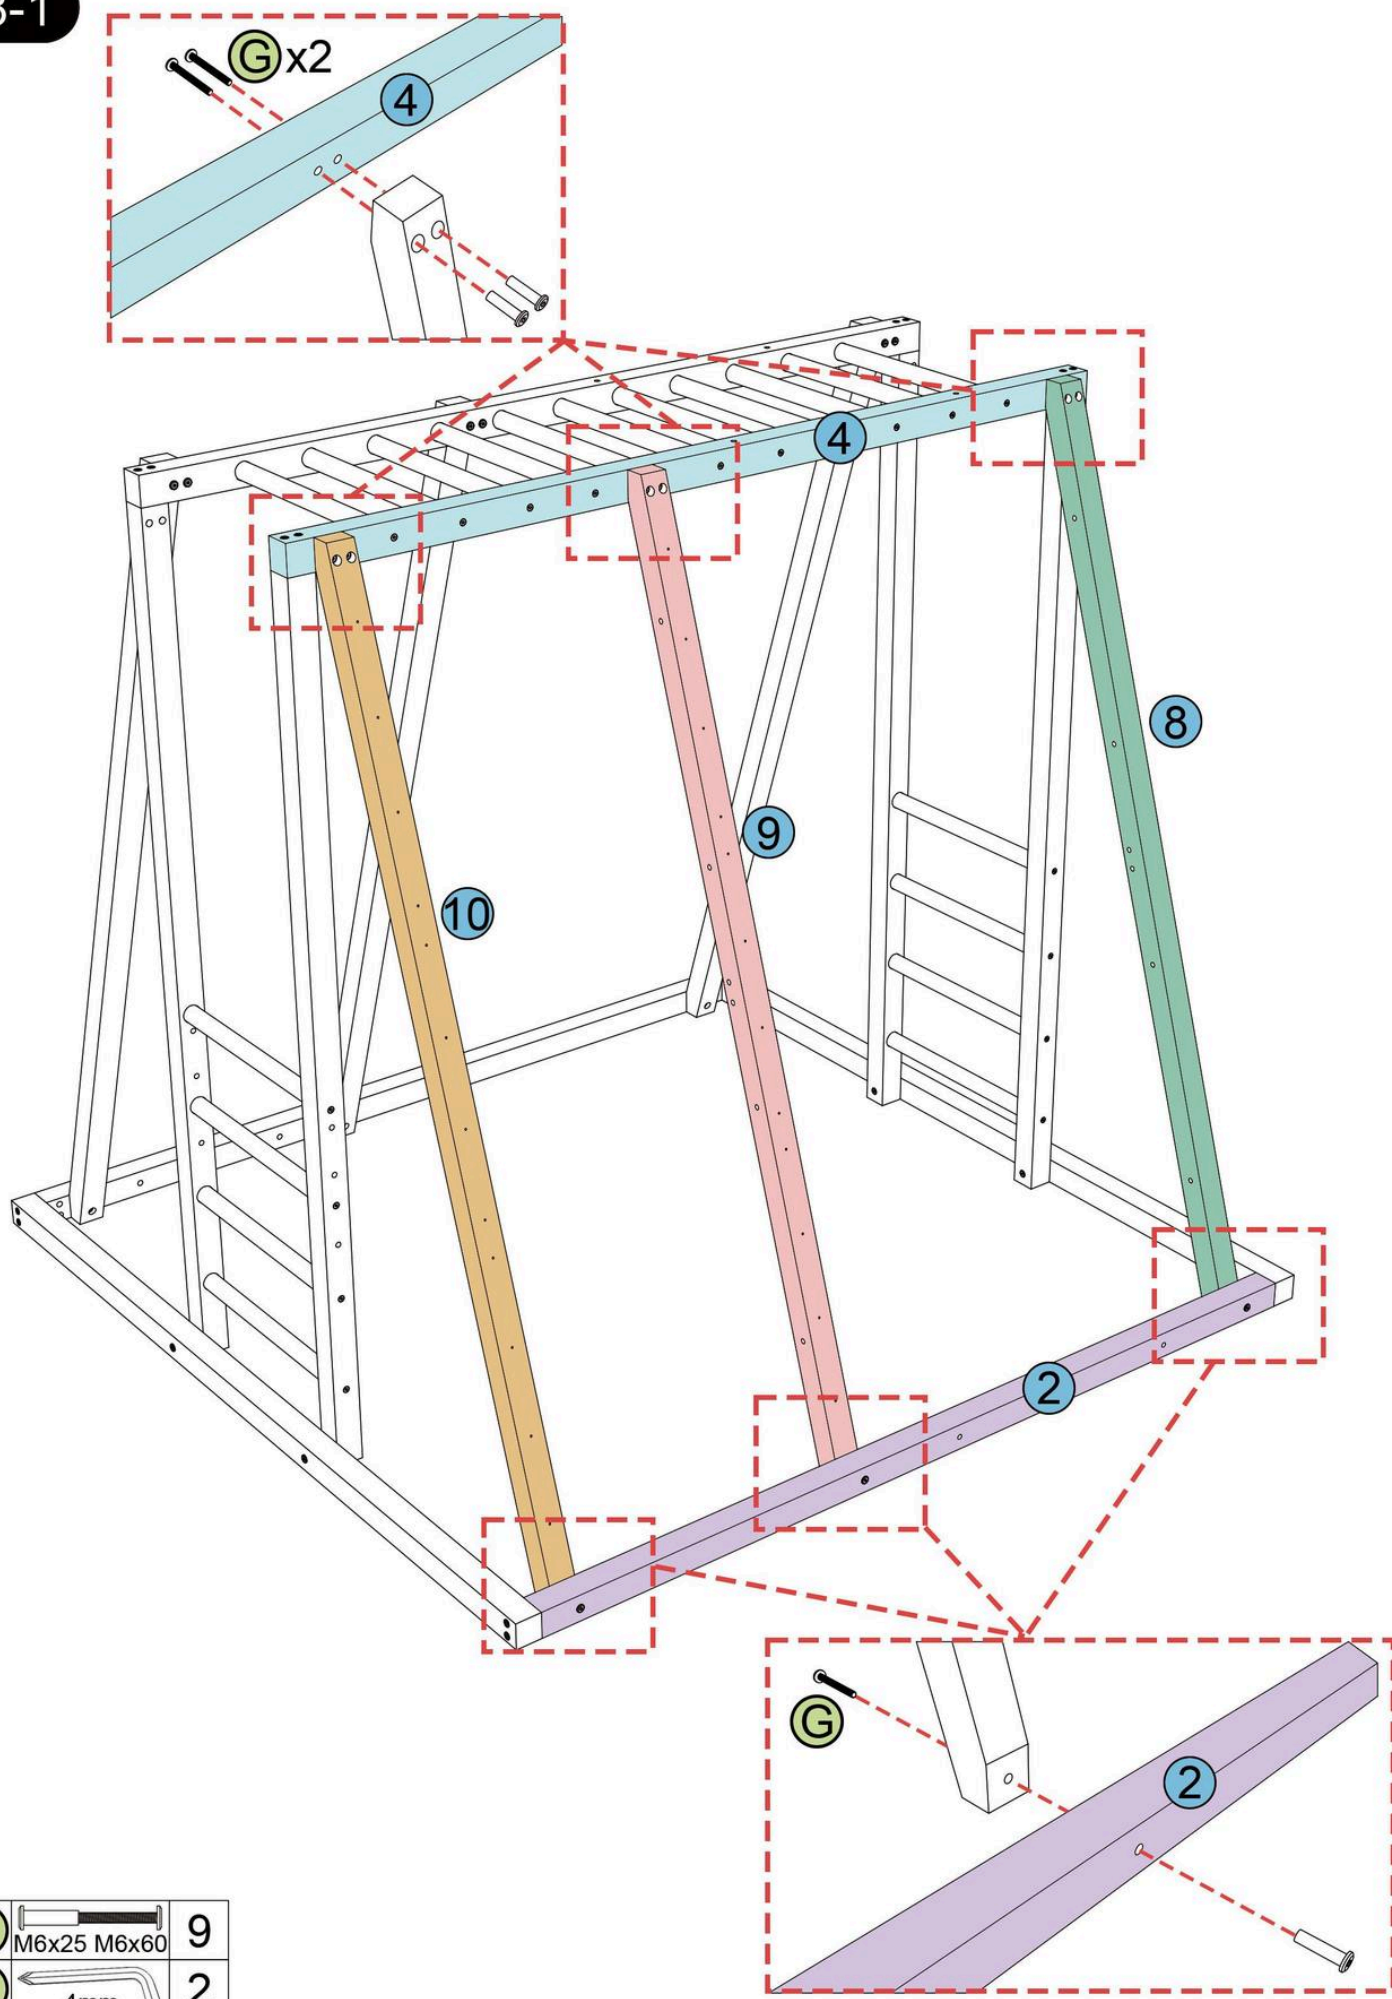


(G)		M6x25 M6x60	9
(N)		4mm	2

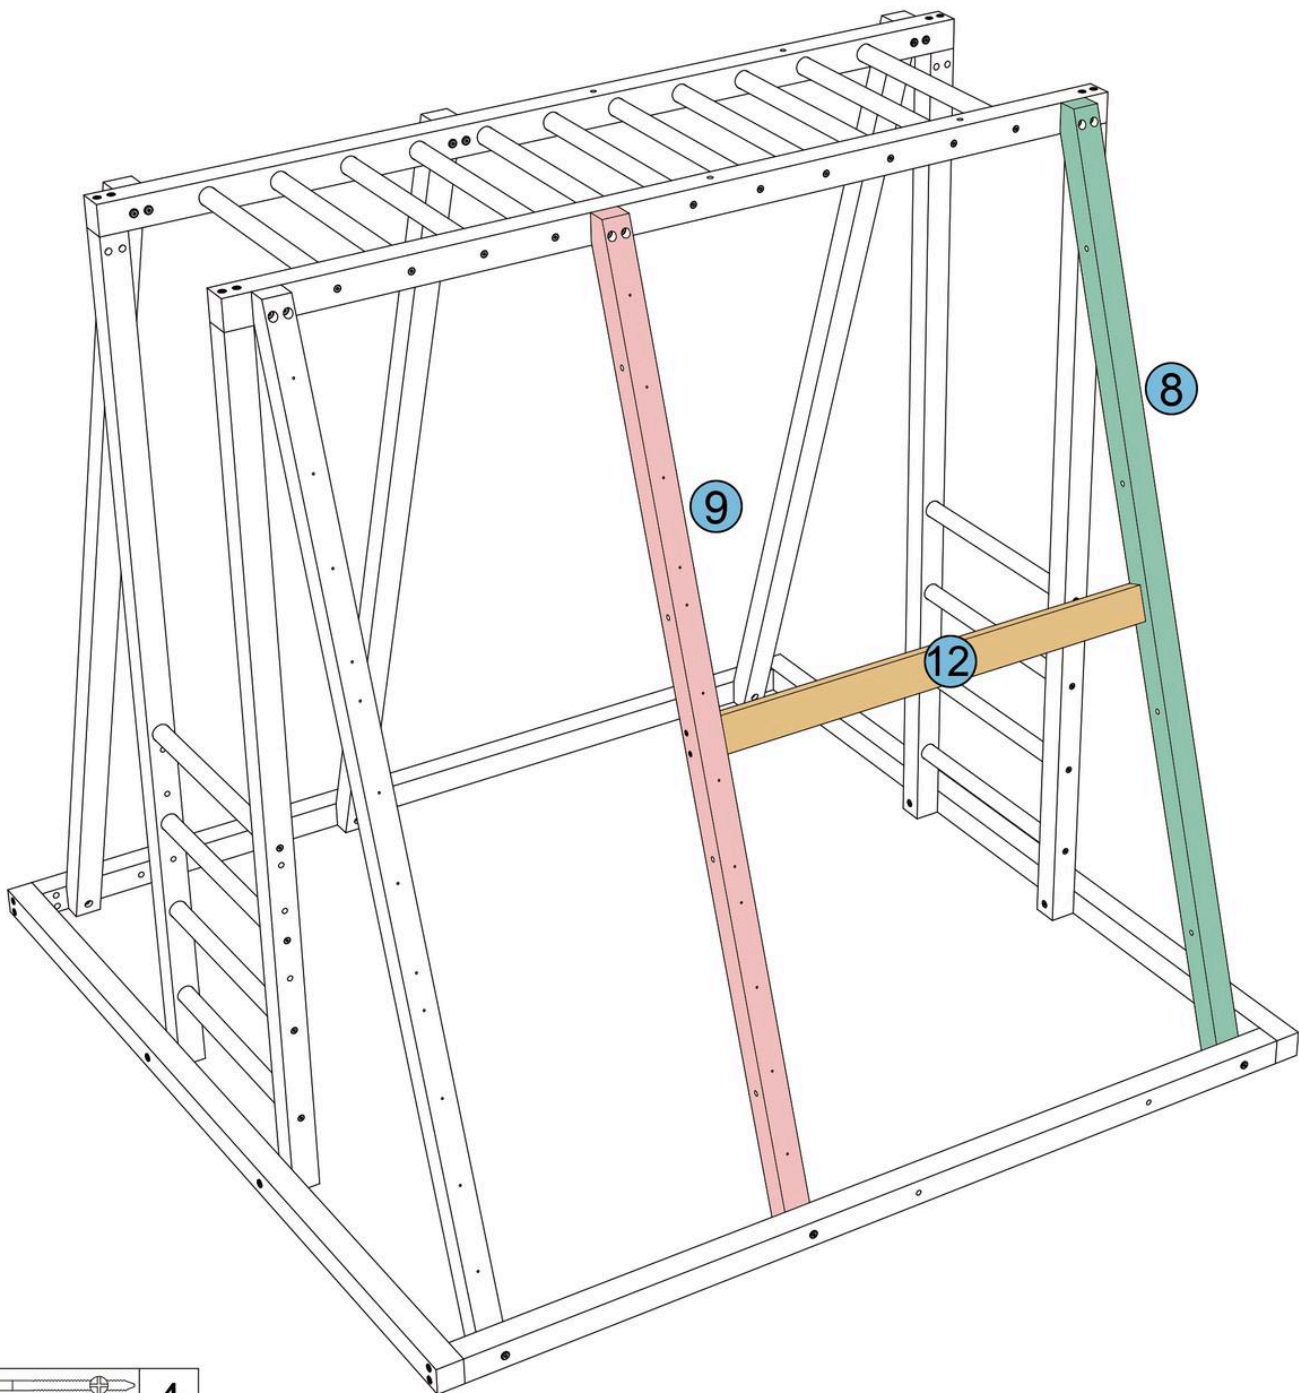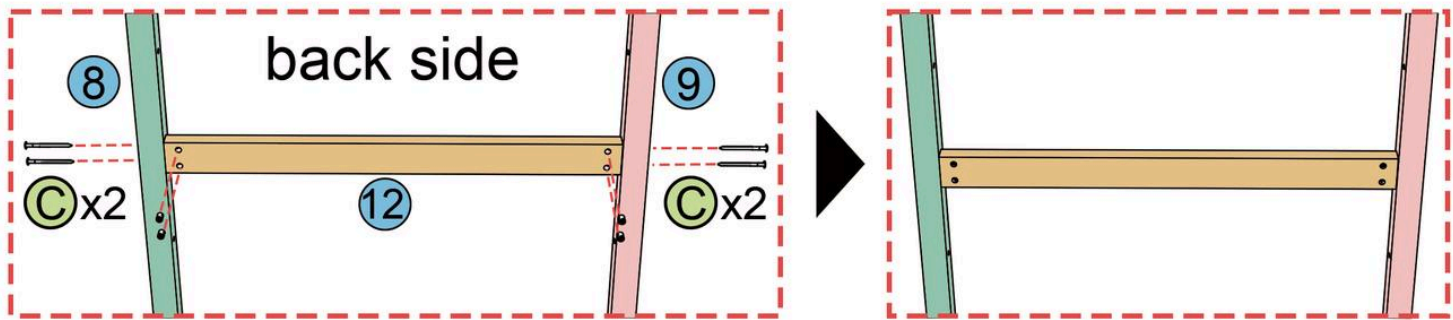


C	M6x80 M6x13	4
N	4mm	2


10-1

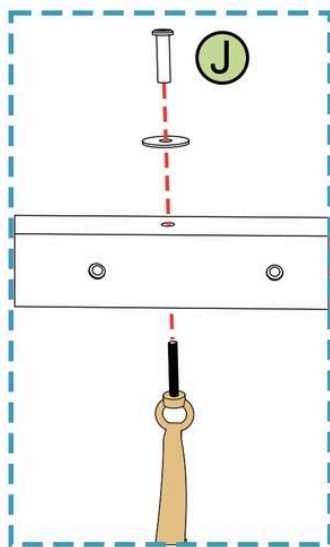


Note: First, screw in all the screws but do not tighten them. After all **K** & **J** screws are screwed in, tighten them.

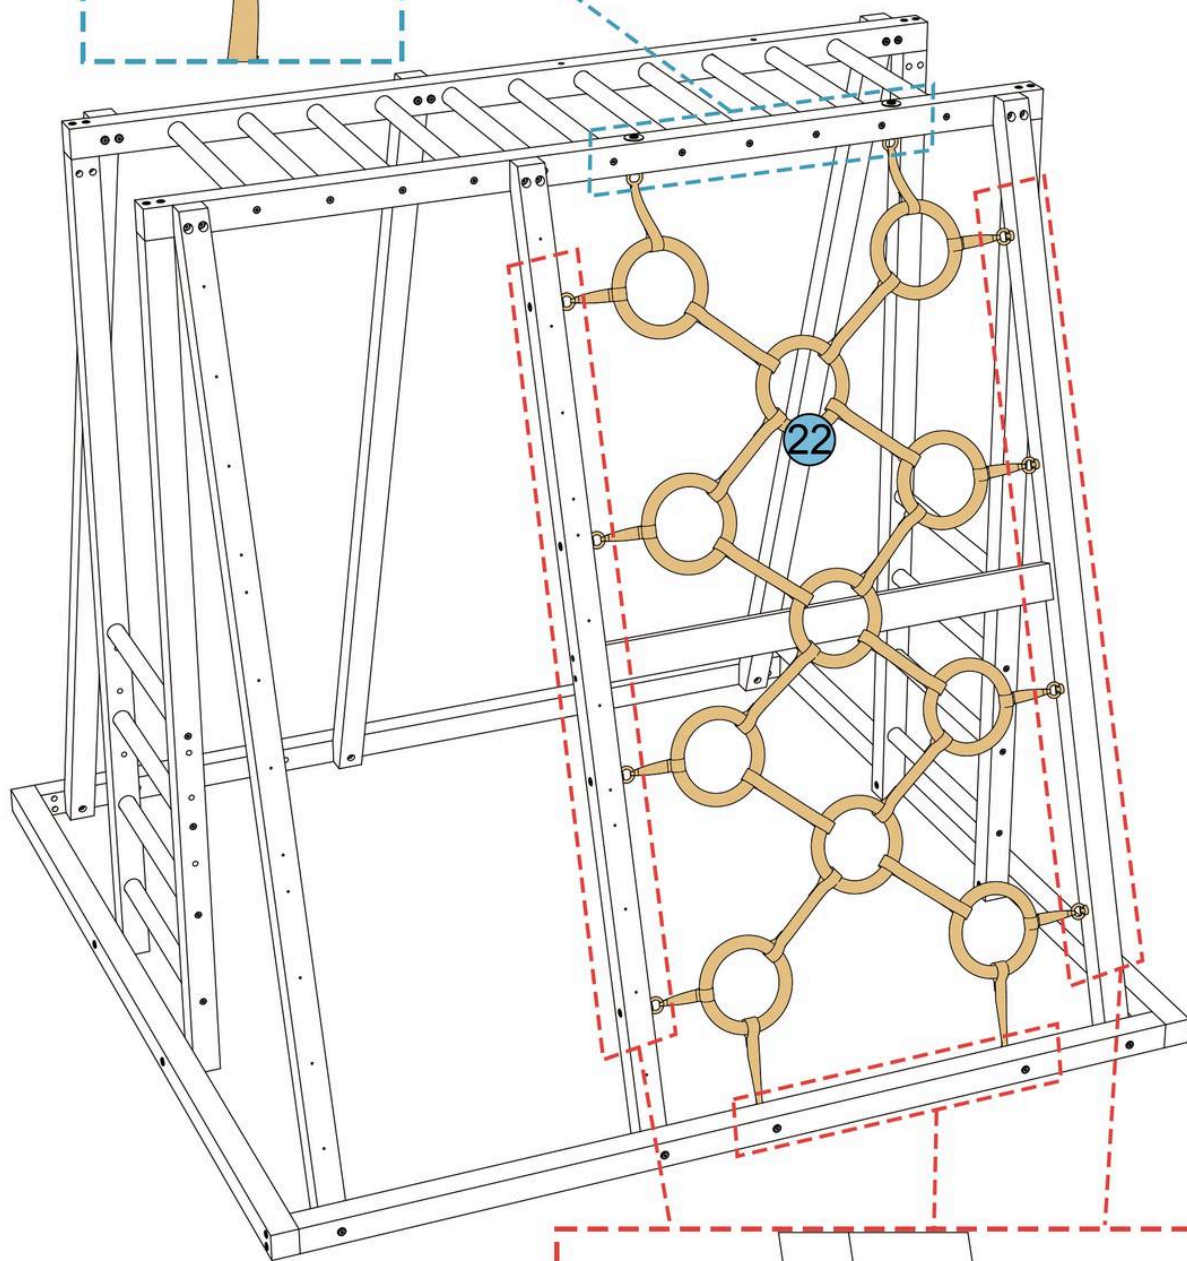


K	M6x25	10
J	M6x30	2

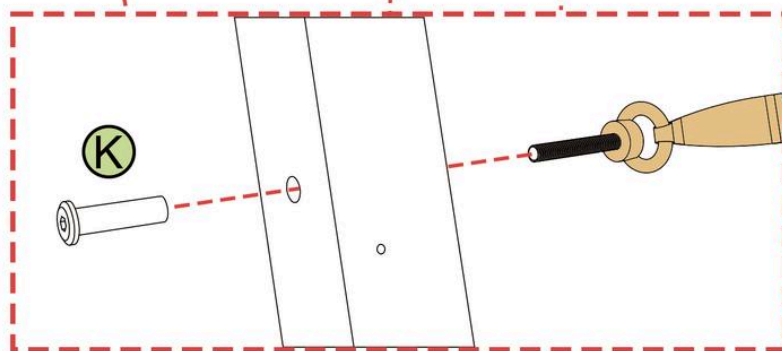

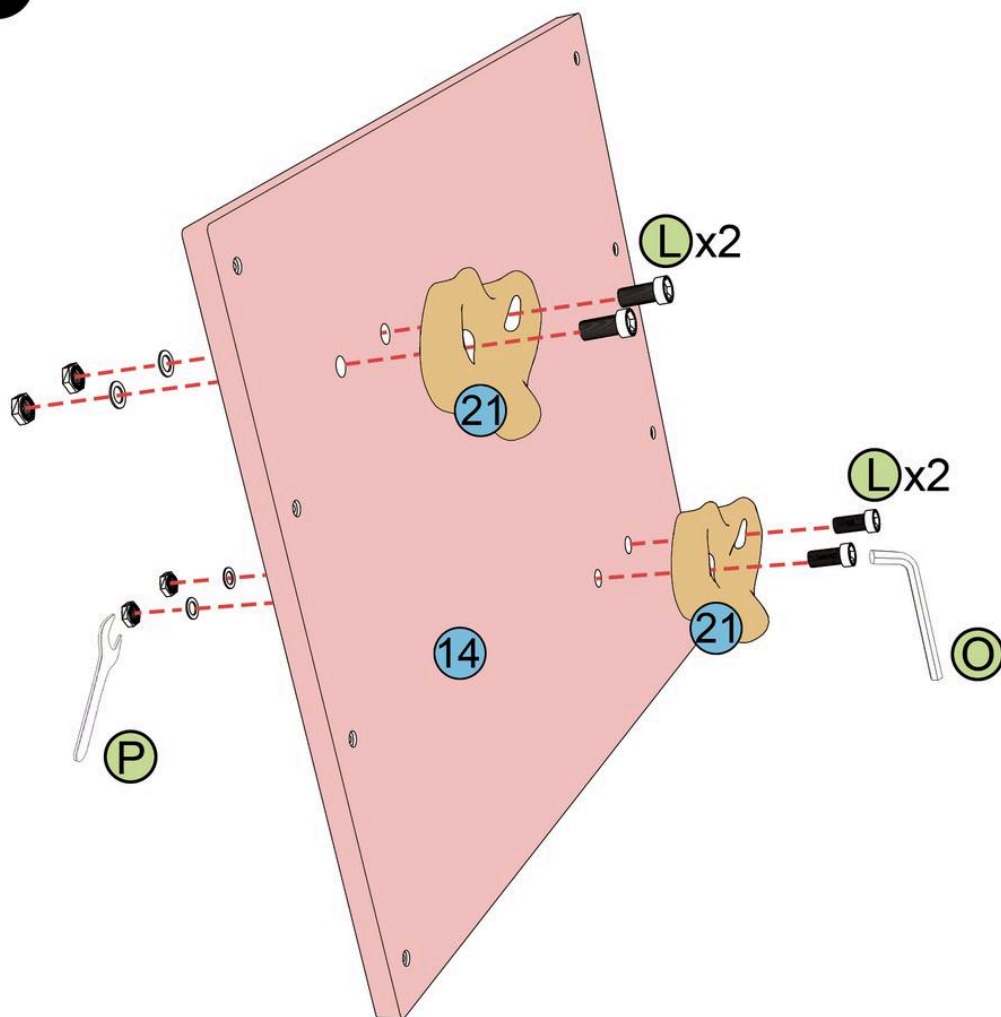



Note: Make sure the blue seal rim on the nut is facing outward towards you. You may need to twist very hard to secure (and if needed spray WD-40) being that it's meant to be very tight and secure for children to climb on!

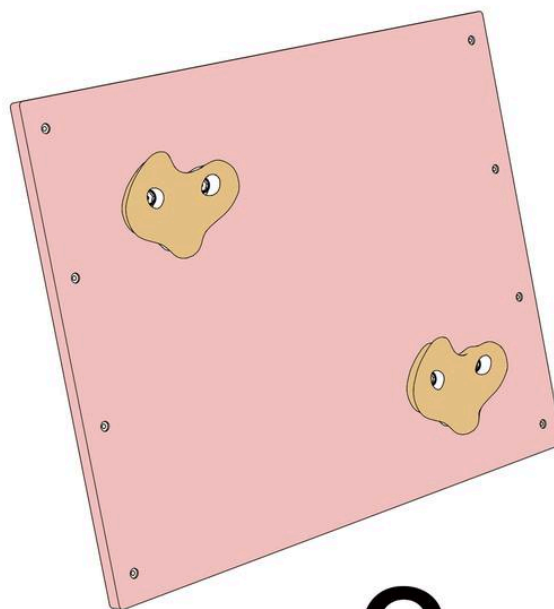



x3



Note: Assemble this step three times.



(L)	M10x35	12
(O)	8mm	1
(P)	17mm	1

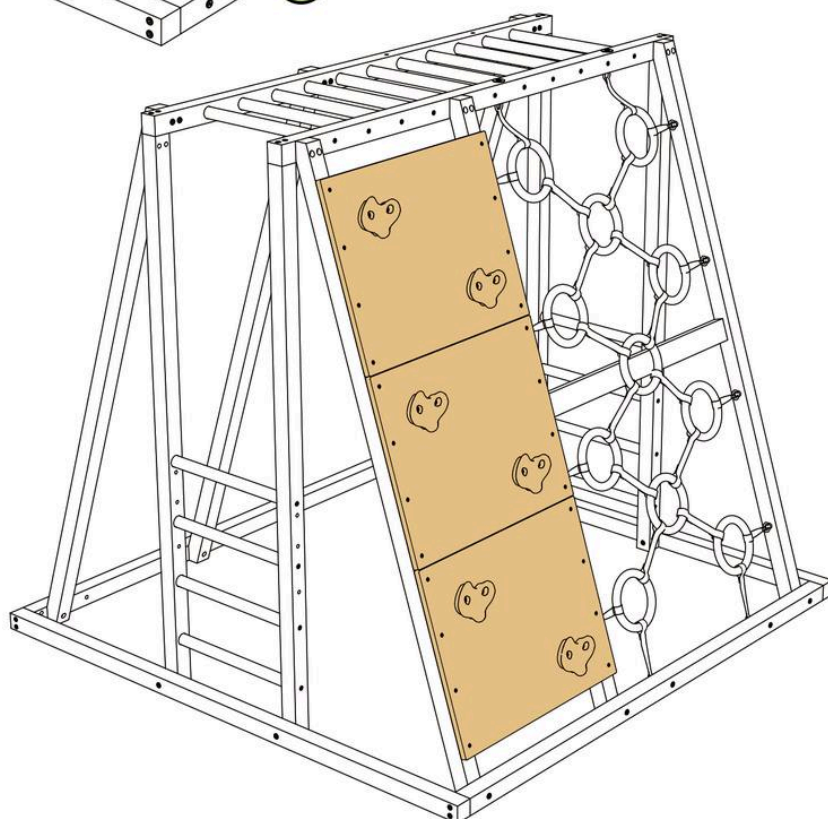
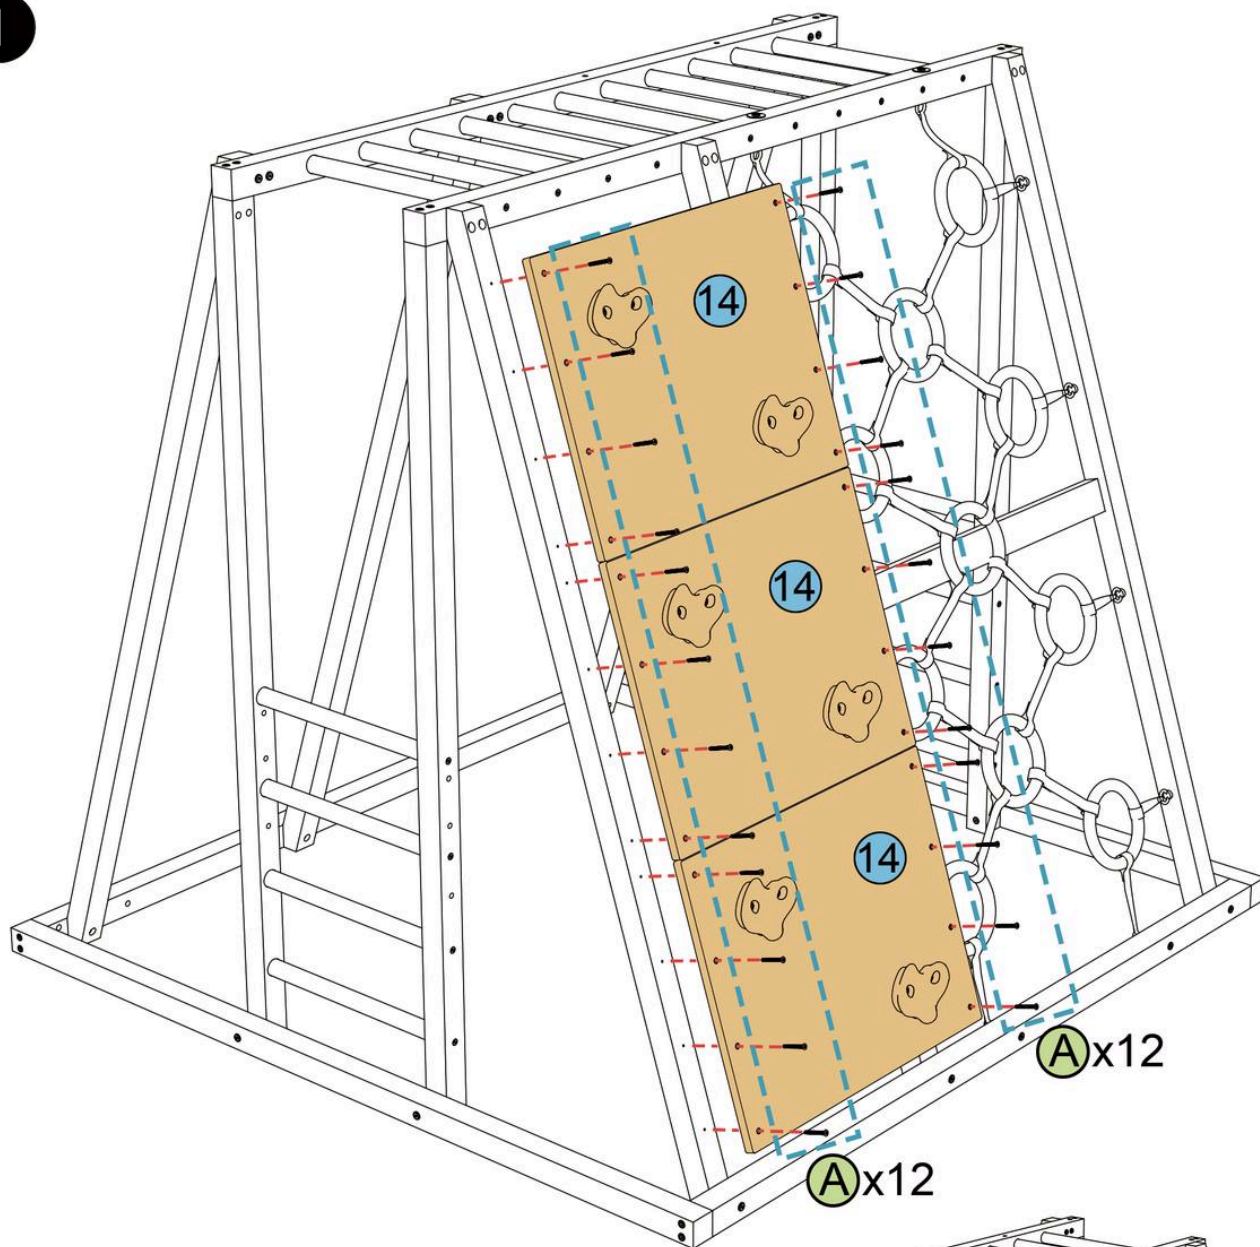




13-1


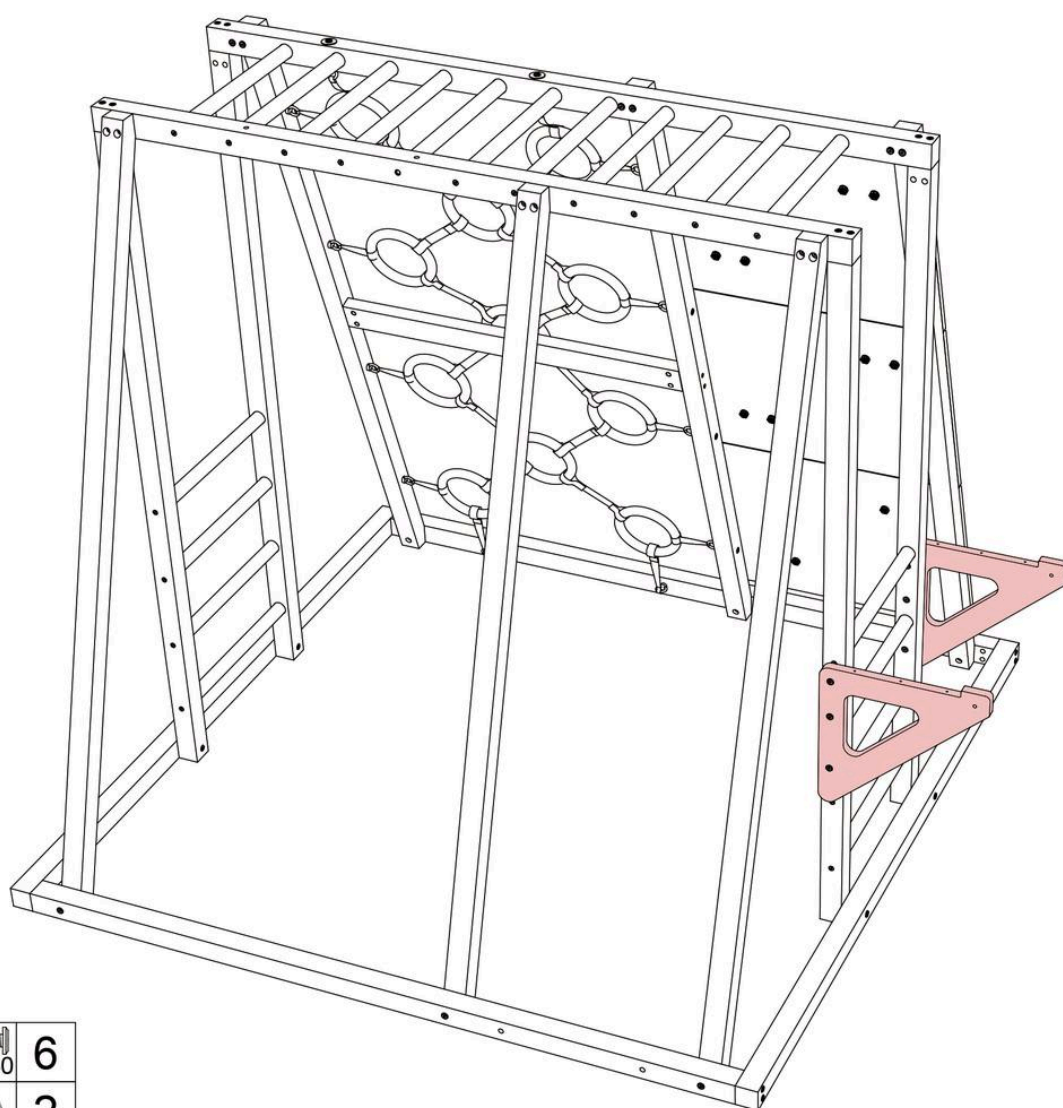
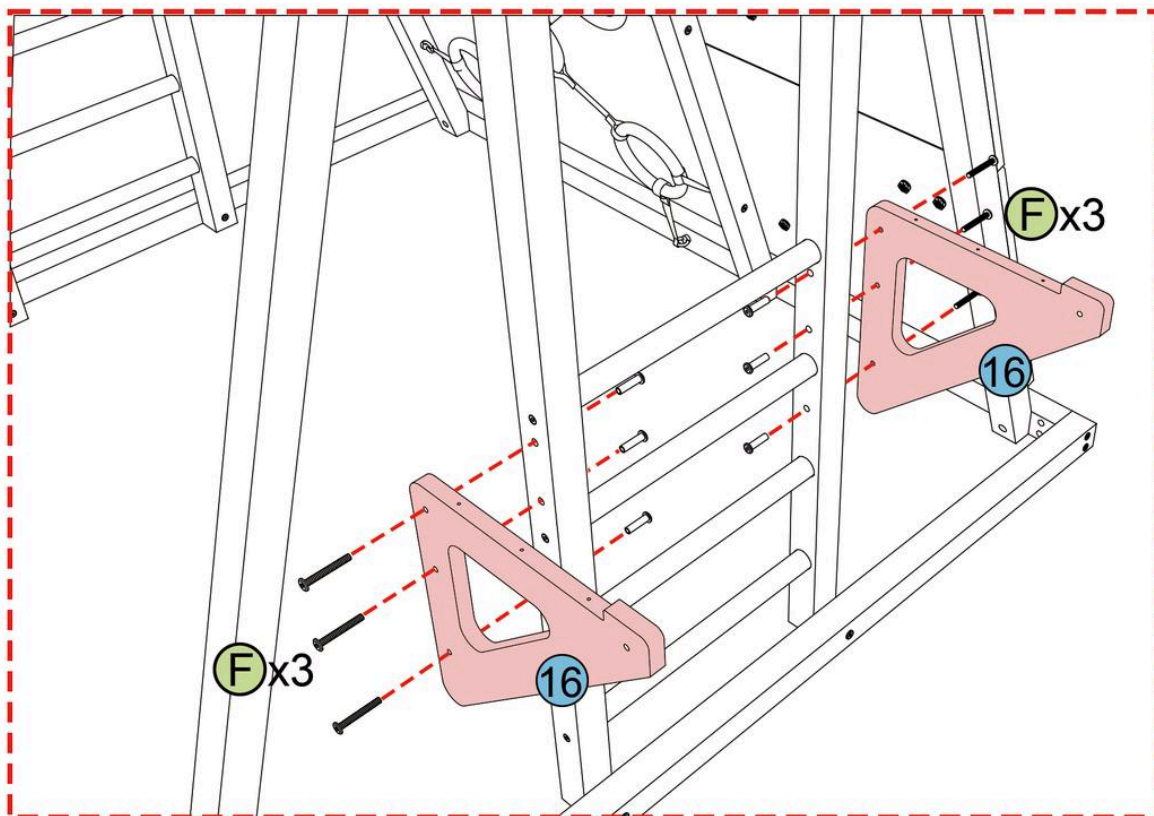


(F)	 M6x25 M6x50	6
(N)	 4mm	2


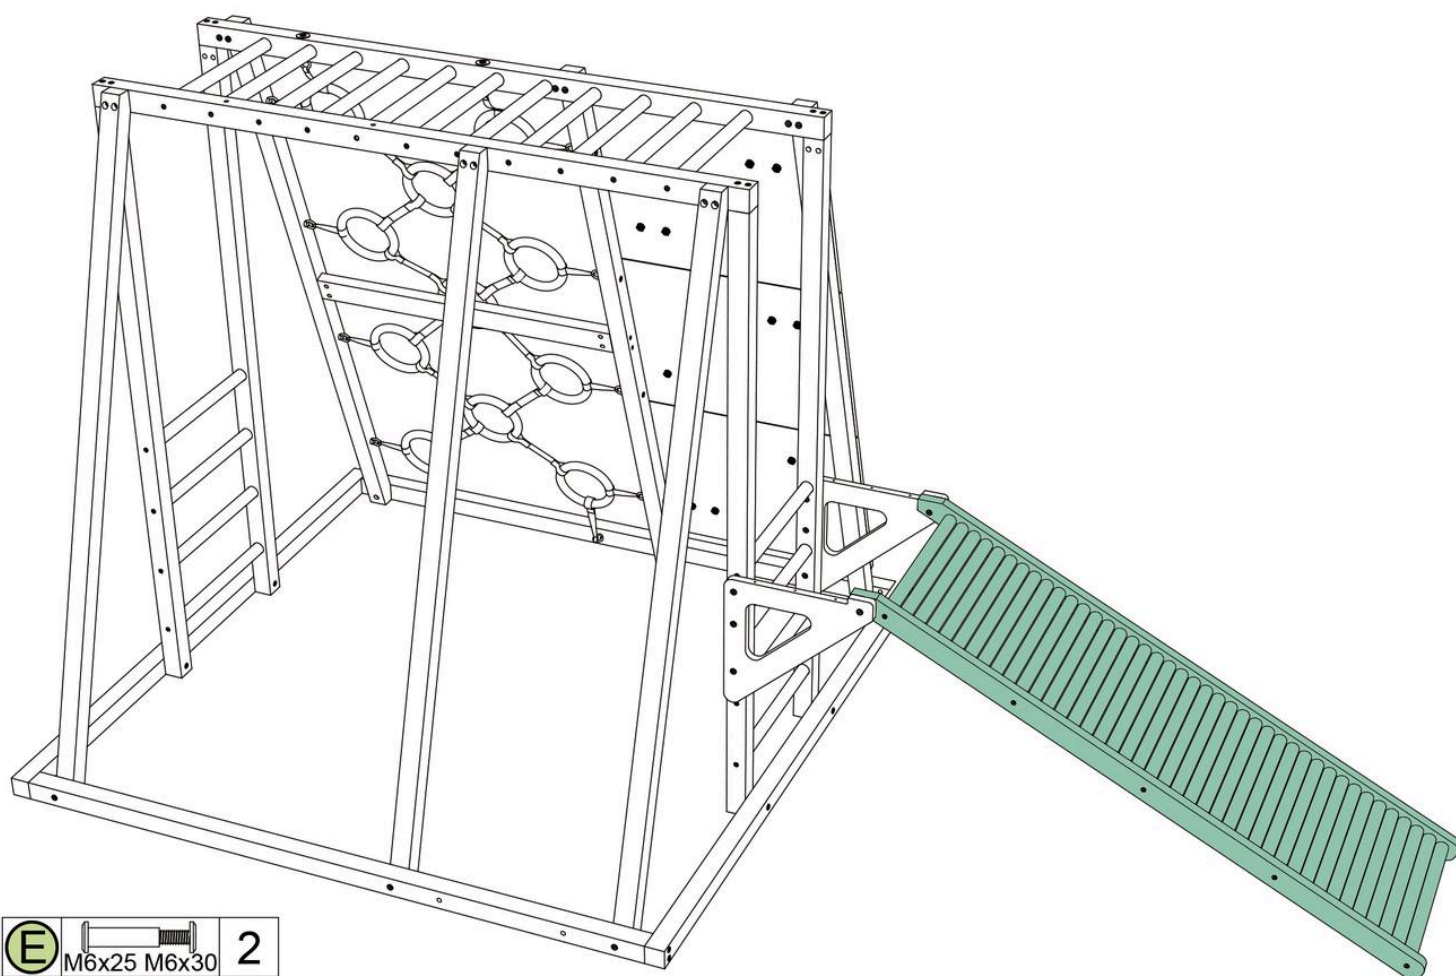
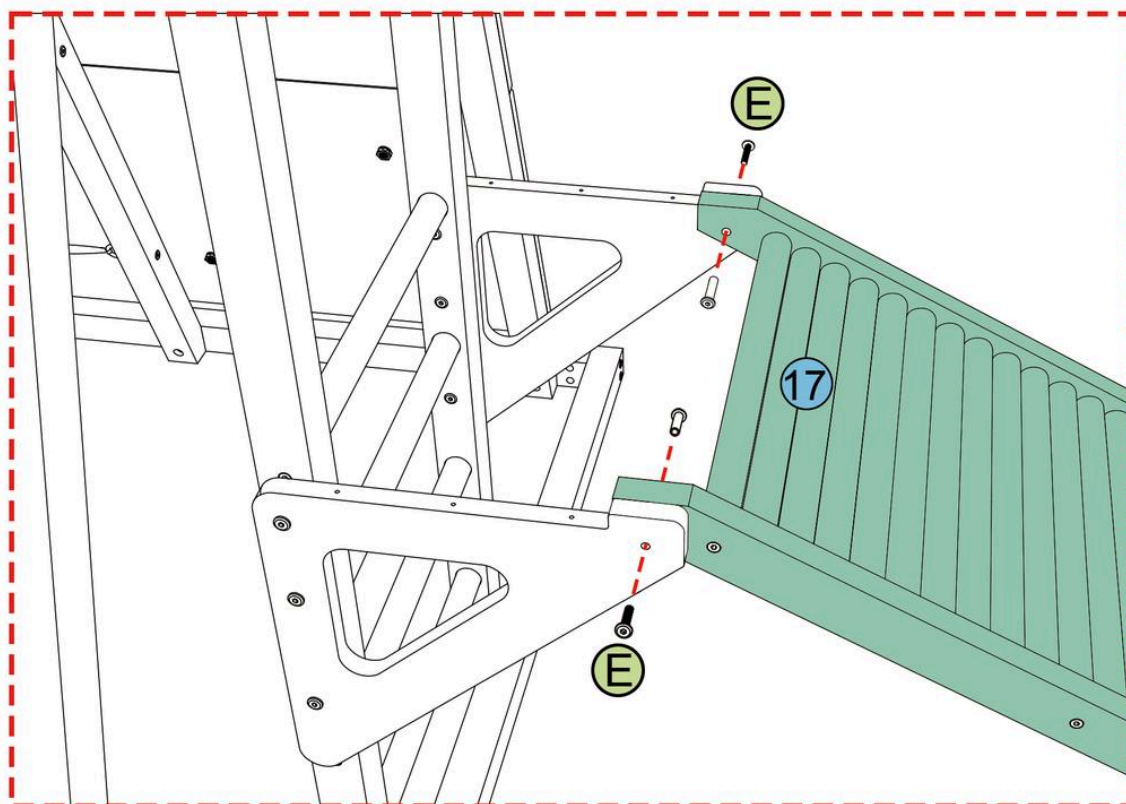


E		M6x25 M6x30	2
N		4mm	2

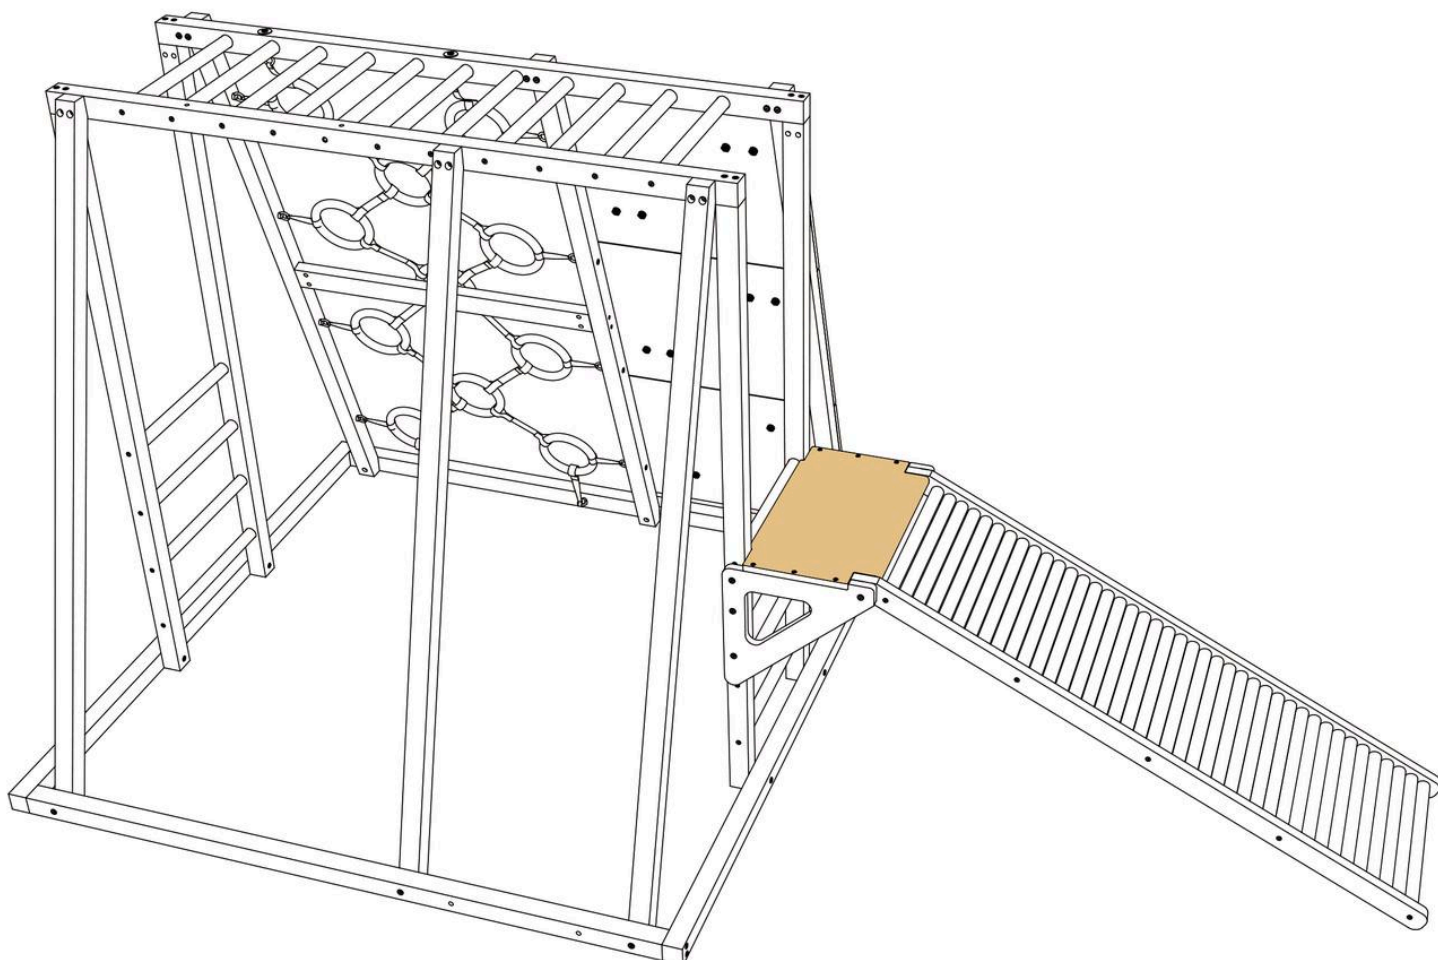
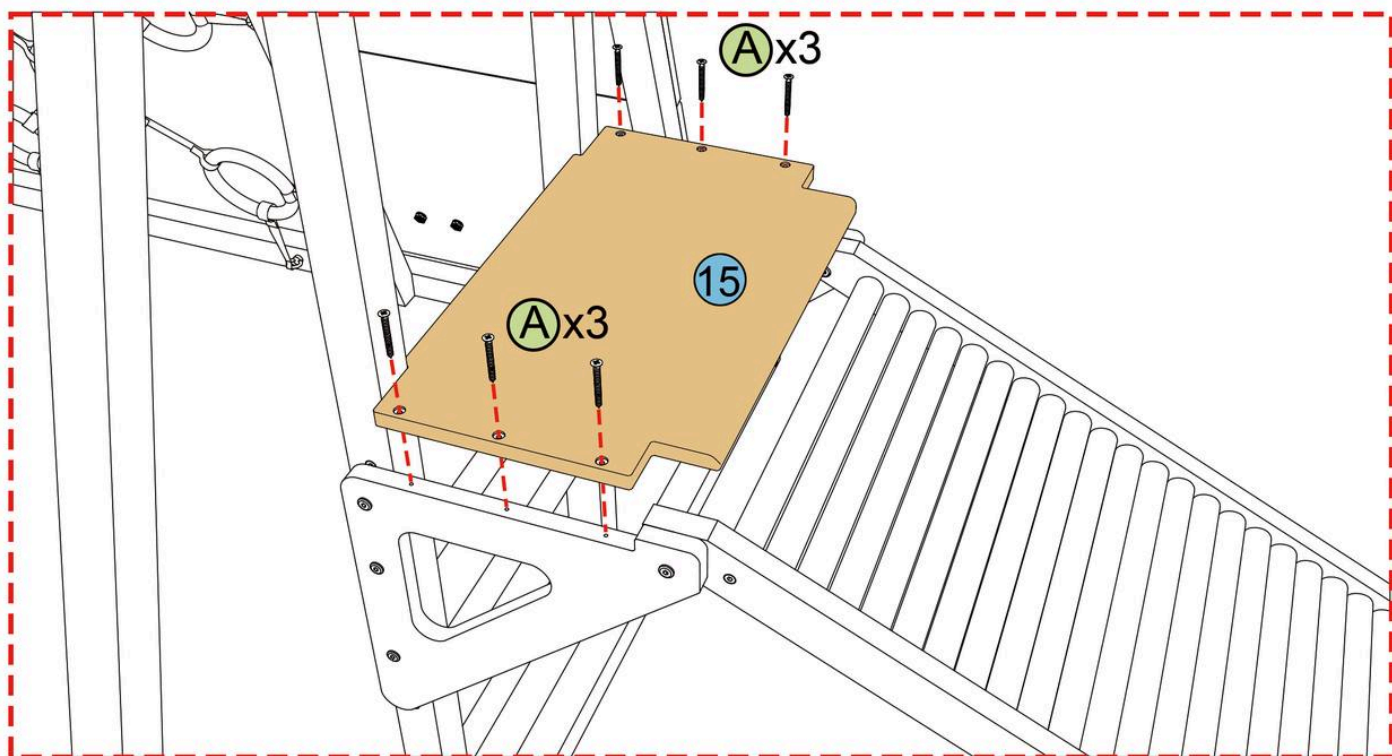


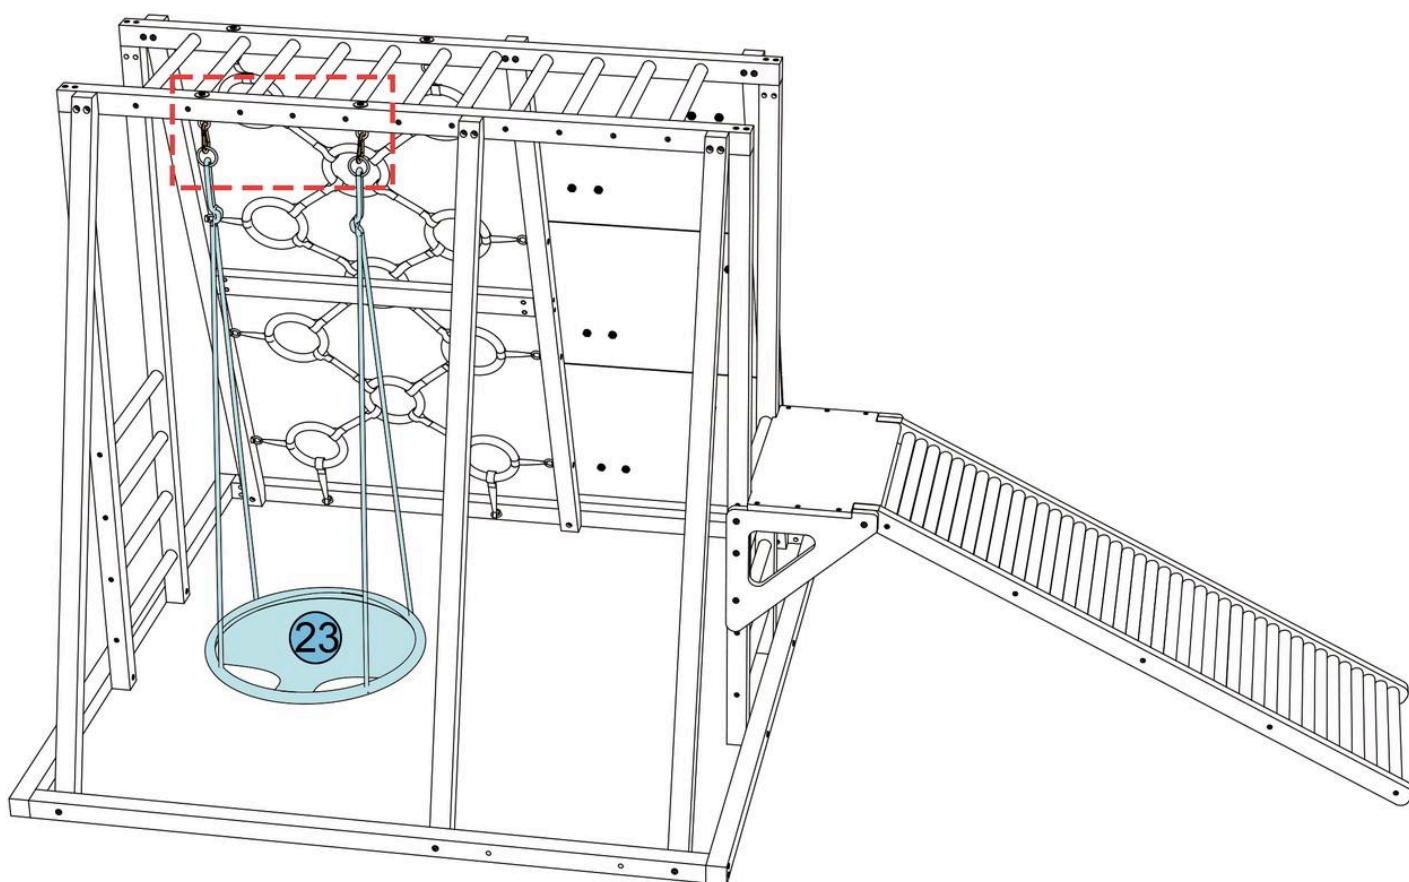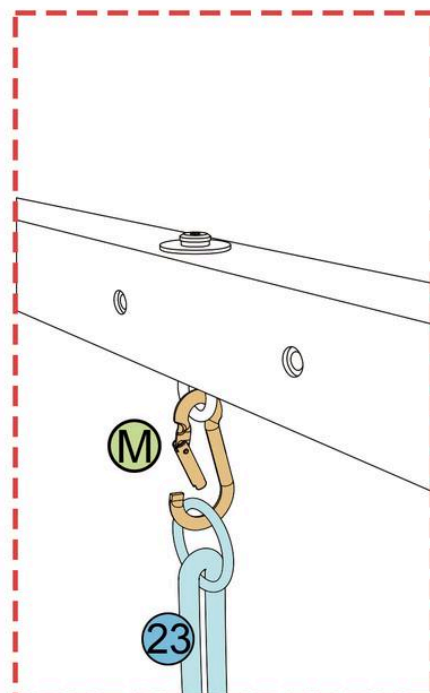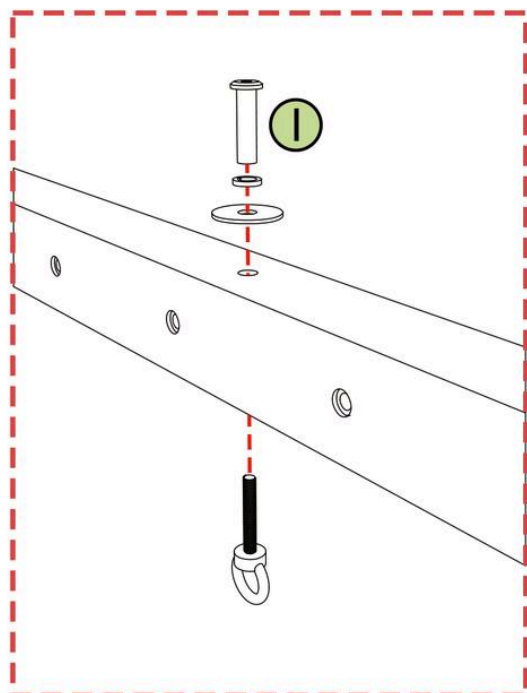

I		2
M		2

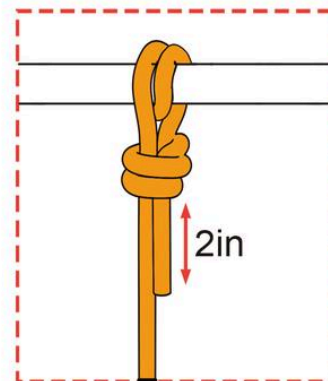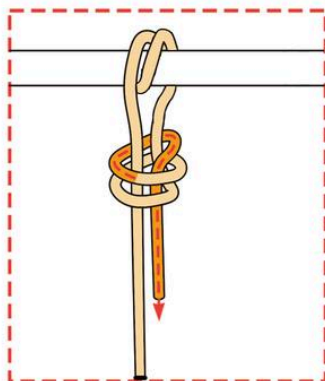
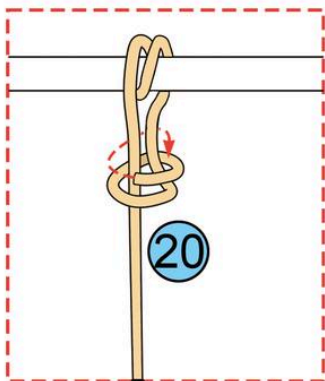


After tying the knot, the end of the rope sticking out should be 2 inches.

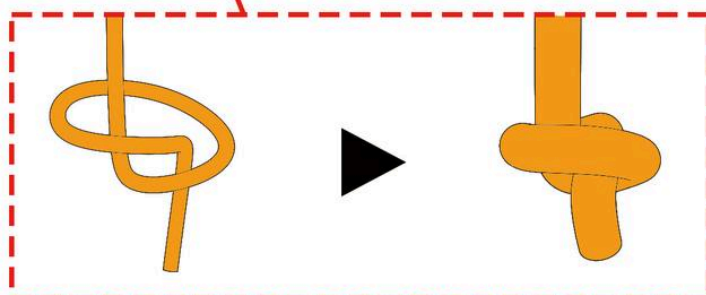
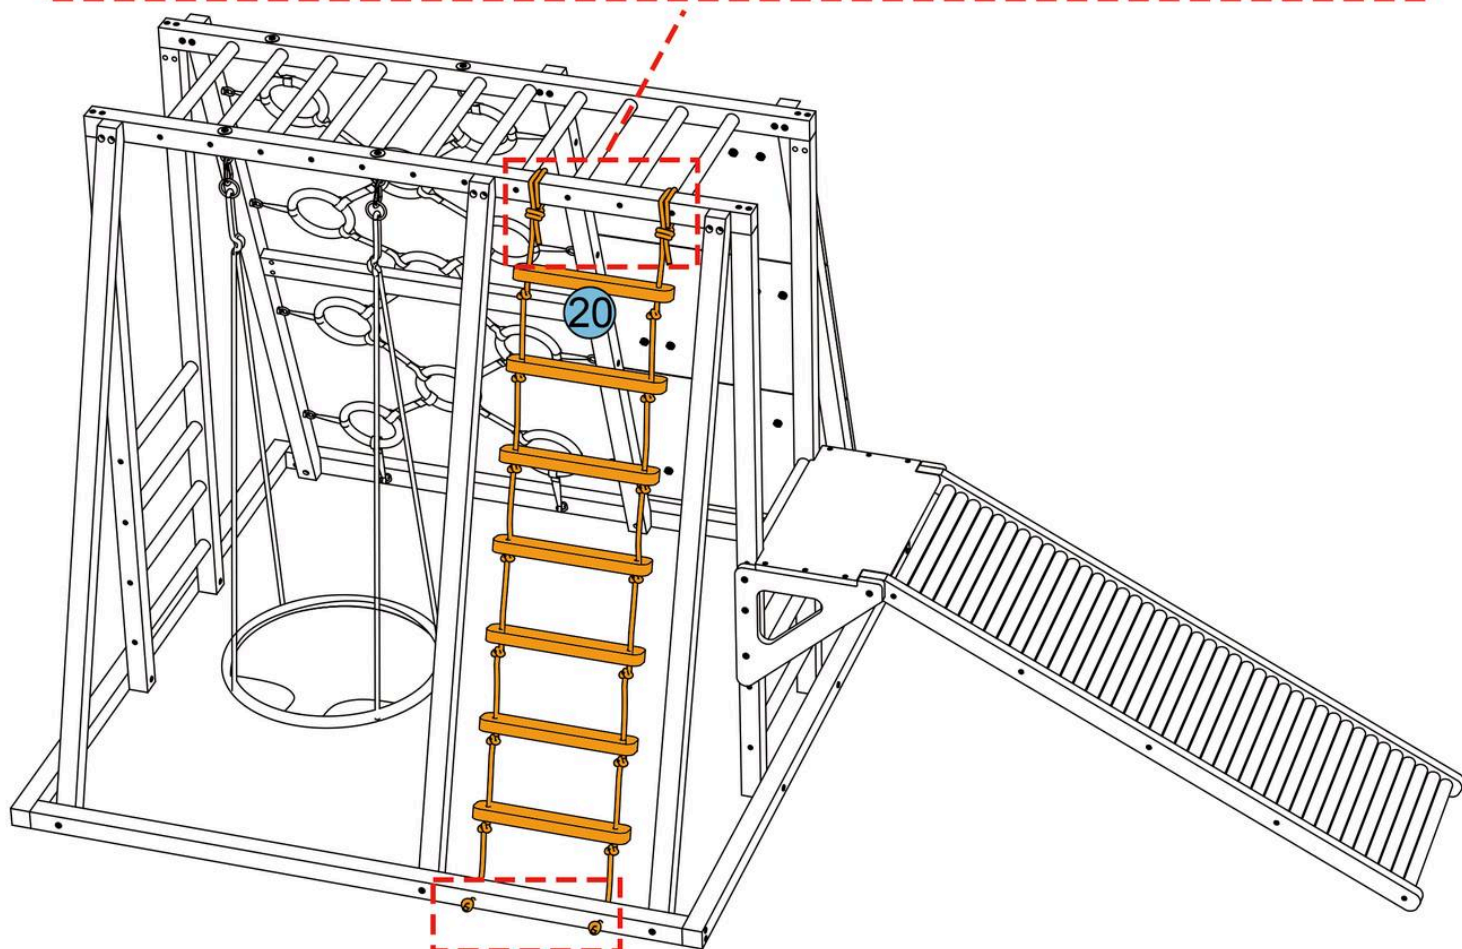


18-1


The pink section and green section can be swapped.
If needed, please follow the steps below to assemble.

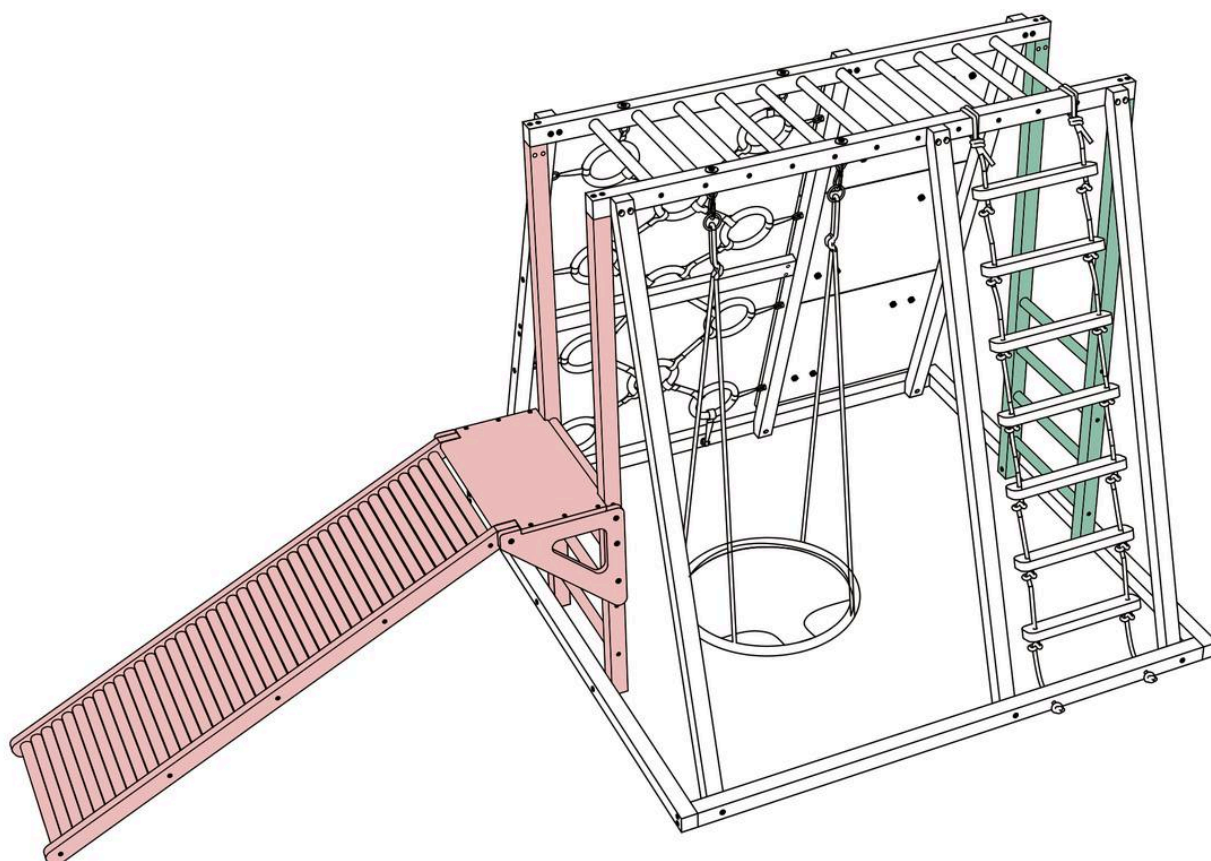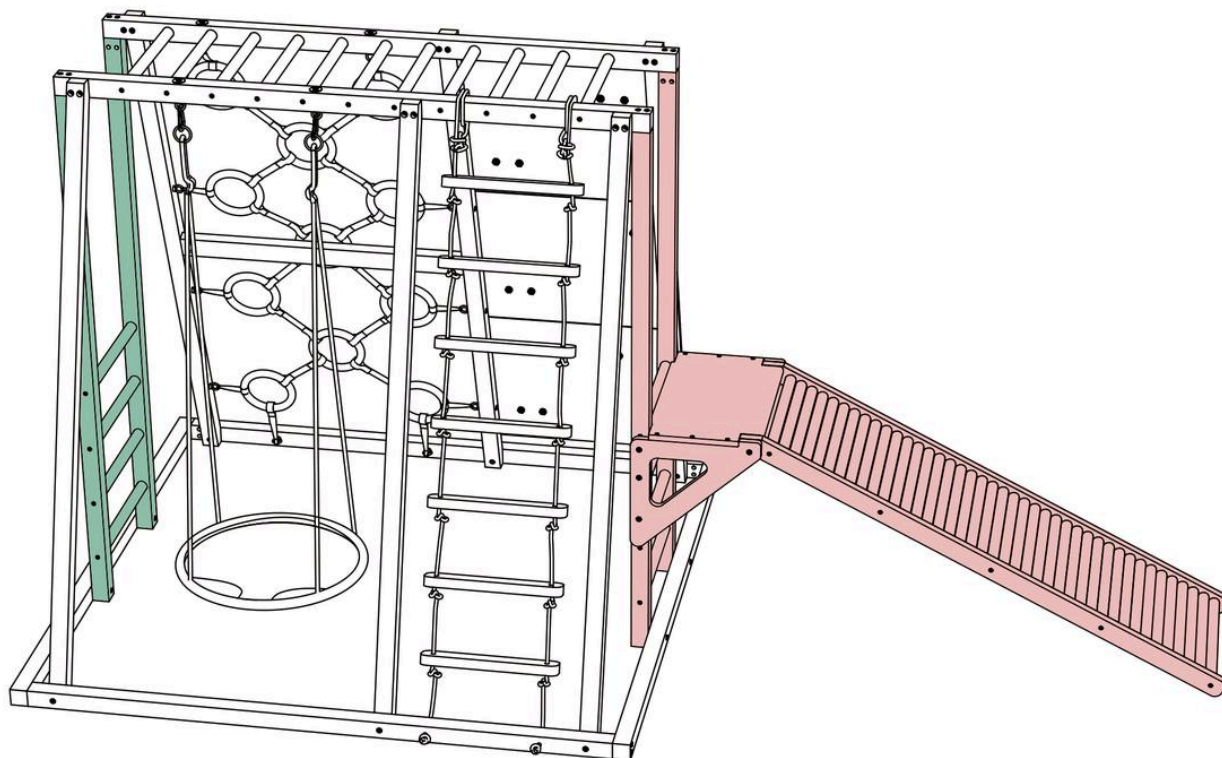


Step 1: Unscrew the two **E** screws and remove the slide.

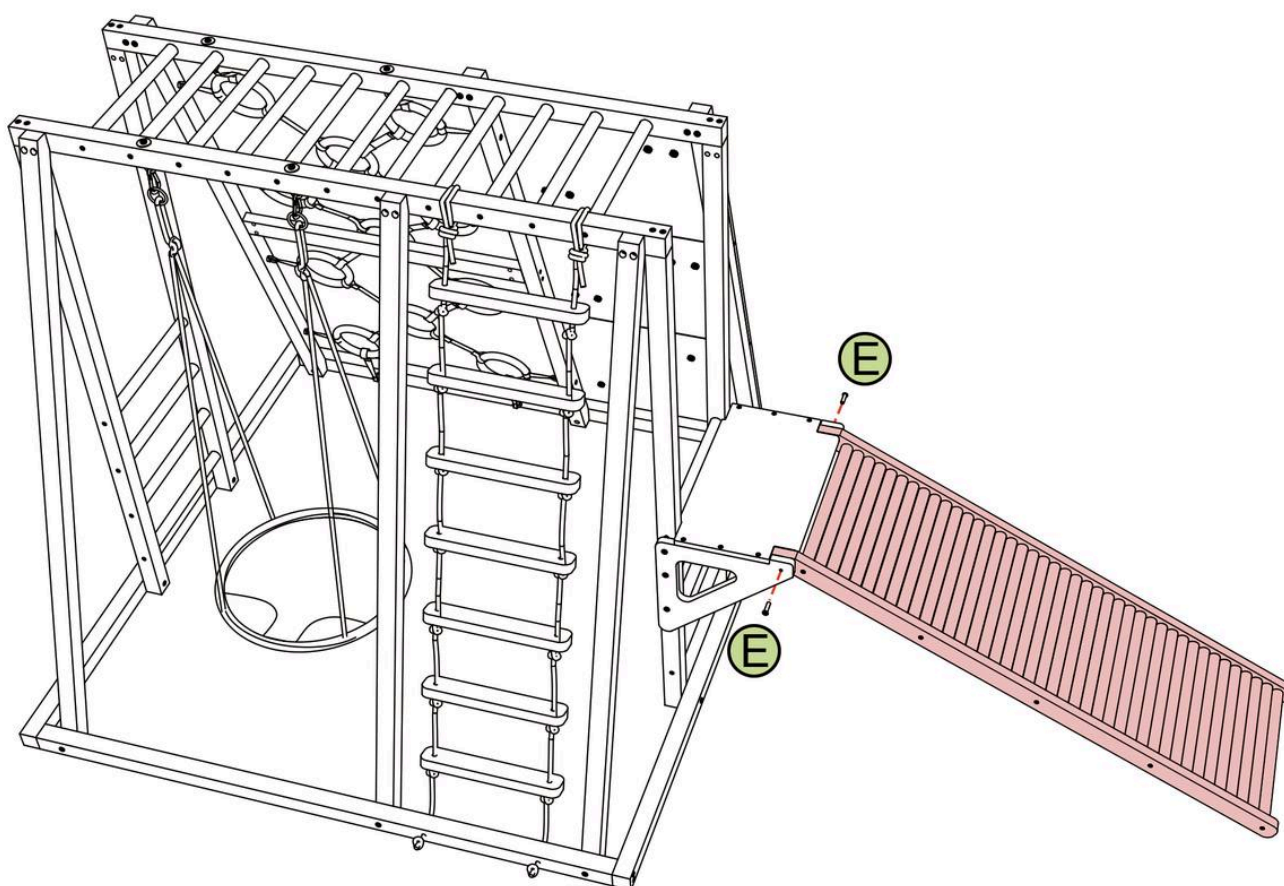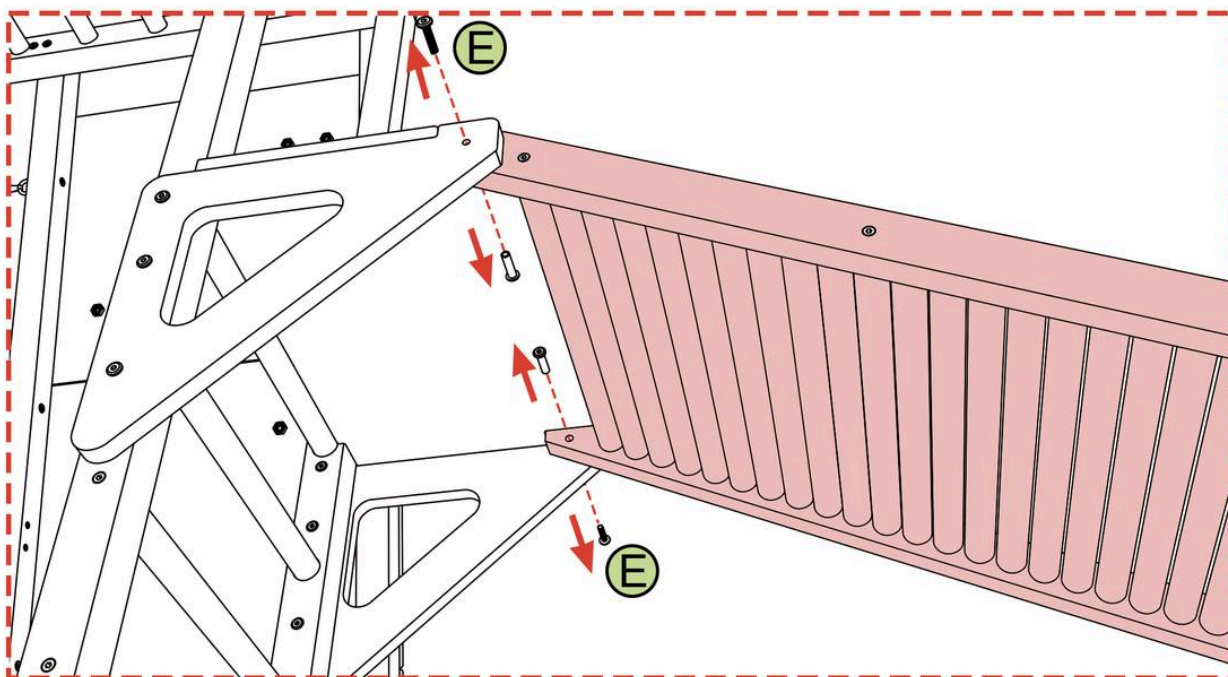


20-1

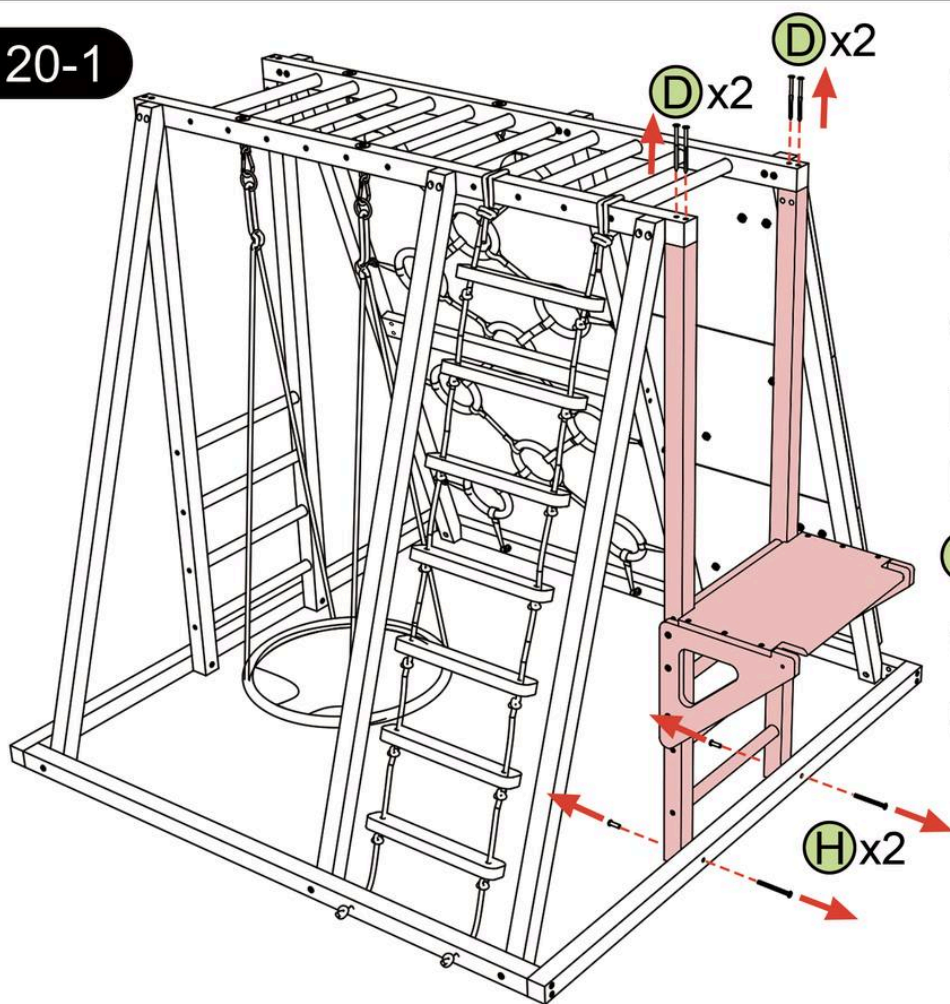

Step 2: Unscrew the 4 **D** screws and 2 **H** screws on both pink and green sections, then remove the pink and green sections. Note: When unscrewing **D**, make sure to remove the nut as well so you can use when reinstalling.

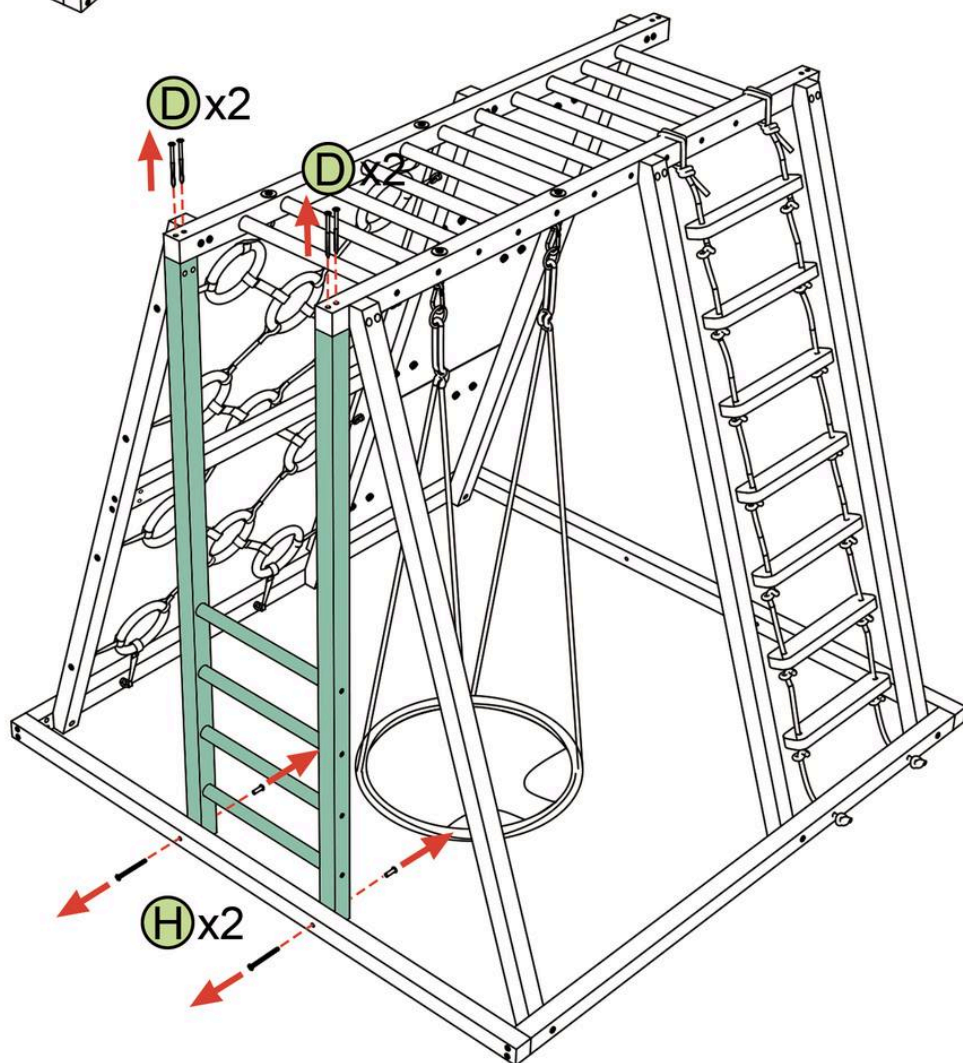

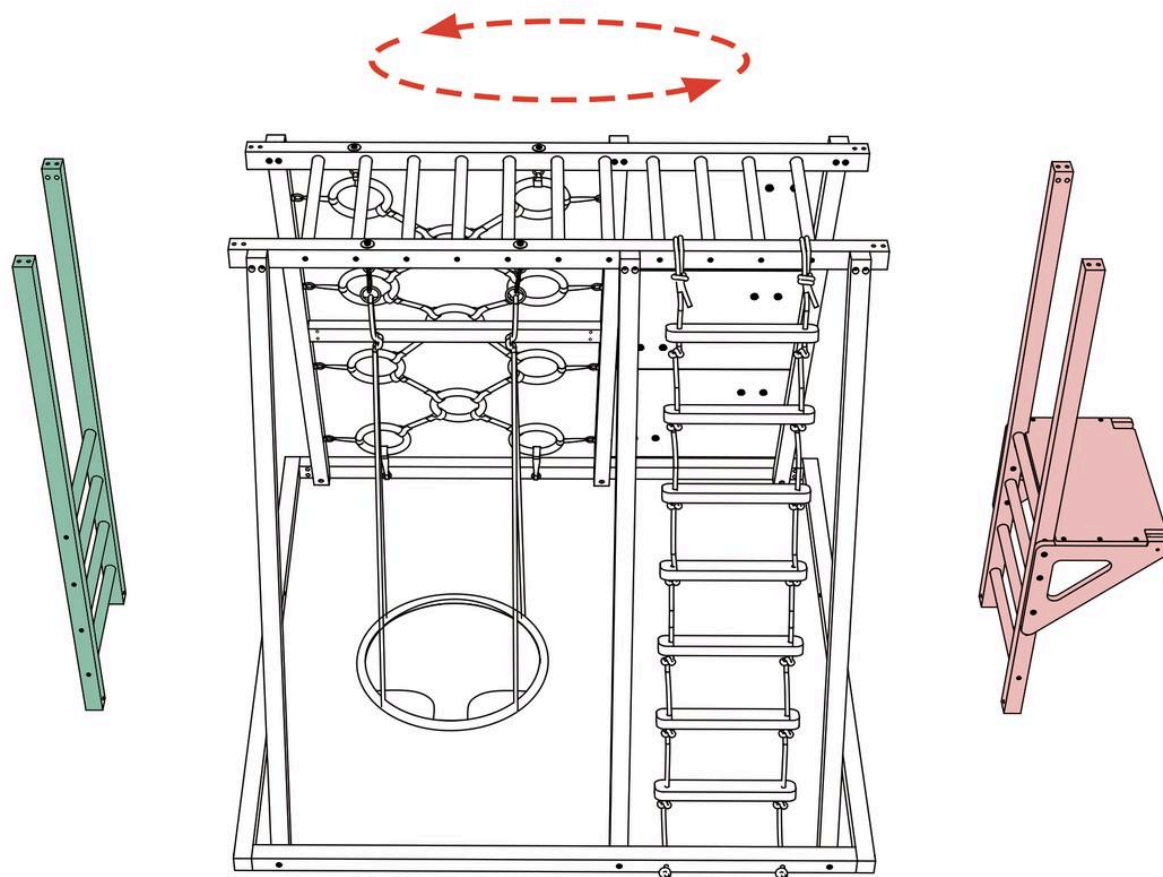

Step 3: Swap the positions of the pink and green sections, reset the removed screws, install the slide to complete the assembly.

